



SKA DDR
DIRECT DRIVE
SERVOMOTORS

MOTORS

**MOTOR
POWER**
COMPANY

Motor Power Company

www.motorpowerco.com

info@motorpowerco.it

All rights reserved.

Complete or partial reproduction
is not allowed without our permission.

All technical data in this catalog
may be changed without prior notice.

SEE IT BEFORE IT HAPPENS



WELCOME TO MOTOR POWER COMPANY

SKA DDR directly driven Motor Power Company motors are the perfect answer for the ideal application. This series provides more torque density than comparably sized conventional servomotors. Versatility is guaranteed due to combination of space-saving of **Frameless** motors and ready-to-use advantages of **Power Pack** configurations.

SKA DDR series means high performances, system design simplification, lower noise, cost reduction, mechanical transmission elimination.

Motor Power Company is able to offer different motors configuration: standard or customized shafts, wide torque range, many feedback technology, quality, service and experience.

This complete series is provided with or without its perfectly coupling drive. Motor Power Company proposes not just components but complete motion solutions, combining direct drive motors with a series of drives with high flexibility and exceptional capabilities in a wide range of applications.

SKA DDR **DIRECT DRIVE**

TECHNOLOGY

SKA DDR is available in **Frameless** version - rotor, stator and feedback as separate components- for the most space saving solutions.
And in **Power Pack** version, full frame motors with different shaft models, for an easy installation.



GEARLESS POWERFUL SOLUTION WITH HIGHER POSITION ACCURACY

Frameless or Power Pack motors

Instantaneous peak torque till 2400 Nm

A high-speed operation up to 1200 rpm

No backlash for a high-precision, high-speed operation with shorter settling time

Improved positioning accuracy

Perfect matching between motor and drives with different network communication

Wide range of feedback devices



SEE IT BEFORE IT HAPPENS

**MOTOR
POWER**
COMPANY

DIRECT DRIVE SYSTEM TECHNICAL IMPROVEMENTS

- Simplified machine structure, adjustment and maintenance
- Fewer parts to assemble, control and purchase
- Direct connection to load increases torsional stiffness
- Low noise level
- No maintenance for lubrication
- Compact design for reduced space requirement
- Easy wiring and piping using the motor's hollow shaft
- No limits due to backlash, friction or inertia
- Motor peak torque can provide 800% of continuous torque
- Reduction and control of energy costs
- Energy efficiency



APPLICATIONS

SKA DDR is suitable for a wide variety of applications.

Packaging machinery

Part unloaders

Actuators

Rotary tables

Material handling

Capping machines

Labelling processes

Print registration stands

Solar energy

Wind energy

Pharma machines

Tool machines

Ceramic tiles machines

Indexing rotary platform

Food and dairy machines

SKA DDR

DIRECT DRIVE SERVOMOTORS

PRODUCT LINEUP

	STALL TORQUE (Nm)	PEAK TORQUE (Nm)	MAXIMUM SPEED @230/400 Vac (Rpm)	POLES (nr)	RATED VOLTAGE (Vac)
SKA DDR 090.30	2	15,9	1200/1200	14	230-400
SKA DDR 090.60	3,5	28	1200/1200	14	230-400
SKA DDR 090.90	4,7	40	1200/1200	14	230-400
SKA DDR 148.30	8	35	1000/1000	14	230-400
SKA DDR 148.60	14	72	1000/1000	14	230-400
SKA DDR 148.90	20	106	900/800	14	230-400
SKA DDR 148.120	26	141	900/800	14	230-400
SKA DDR 148.150	30	170	750/800	14	230-400
SKA DDR 148.240	48	260	750/800	14	230-400
SKA DDR 245.30	41	128	750/800	28	230-400
SKA DDR 245.60	70	241	750/800	28	230-400
SKA DDR 245.90	93	350	300/500	28	230-400
SKA DDR 245.120	115	458	300/500	28	230-400
SKA DDR 335.30	100	290	300/500	42	230-400
SKA DDR 335.60	164	550	300/500	42	230-400
SKA DDR 335.90	220	800	300/300	42	230-400
SKA DDR 335.120	270	1043	300/300	42	230-400
SKA DDR 335.150	320	1290	300/300	42	230-400
SKA DDR 430.30	210	458	180/300	56	230-400
SKA DDR 430.60	340	868	180/300	56	230-400
SKA DDR 430.90	450	1254	90/150	56	230-400
SKA DDR 430.120	560	1649	90/150	56	230-400
SKA DDR 430.150	660	2025	50/90	56	230-400
SKA DDR 430.180	760	2400	50/90	56	230-400

SKA DDR FRAMELESS MOTOR TYPE DESIGNATION

SKA DDR FL 090 60 19 00 14 96

Servomotor Name	Model	Size	Winding code	Hall Sensor	Connectors	Options
	1	2	3	4	5	6

1 Choose SKA DDR model among 090 - 148 - 245 - 335 - 430

2 Choose SKA DDR size among
 30-60-90 for model 90
 30-60-90-120-150-240 for model 148
 30-60-90-120 for model 245
 30-60-90-120-150 for model 335
 30-60-90-120-150 -180 for model 430

3	Winding Code	17	18	19	50	51	52	53	54	55	56
Motor											
SKA DDR 090.30	•	•	•	•	-	-	-	-	-	-	-
SKA DDR 090.60	•	•	•	•	-	-	-	-	-	-	-
SKA DDR 090.90	•	•	•	•	•	-	-	-	-	-	-
SKA DDR 148.30	•	•	•	•	•	•	•	-	-	-	-
SKA DDR 148.60	•	•	•	•	•	•	•	-	-	-	-
SKA DDR 148.90	•	•	•	•	•	•	•	•	-	-	-
SKA DDR 148.120	-	•	•	•	•	•	•	•	-	-	-
SKA DDR 148.150	-	-	•	•	•	•	•	•	-	-	•
SKA DDR 148.240	-	-	•	•	•	•	•	•	-	-	•
SKA DDR 245.30	-	-	•	•	•	•	•	•	-	-	-
SKA DDR 245.60	-	-	•	•	•	•	•	•	-	-	-
SKA DDR 245.90	-	-	-	-	•	•	•	•	-	-	-
SKA DDR 245.120	-	-	-	-	•	•	•	•	-	-	-
SKA DDR 335.30	-	-	-	-	•	•	•	•	-	-	-
SKA DDR 335.60	-	-	-	-	•	•	•	•	-	-	-
SKA DDR 335.90	-	-	-	-	•	•	•	•	•	•	-
SKA DDR 335.120	-	-	-	-	•	•	•	•	•	•	-
SKA DDR 335.150	-	-	-	-	•	•	•	•	•	•	-
SKA DDR 430.30	-	-	-	-	-	•	•	•	•	•	•
SKA DDR 430.60	-	-	-	-	-	•	•	•	•	•	•
SKA DDR 430.90	-	-	-	-	-	-	•	•	•	•	•
SKA DDR 430.120	-	-	-	-	-	-	•	•	•	•	-
SKA DDR 430.150	-	-	-	-	-	-	-	•	•	•	-
SKA DDR 430.180	-	-	-	-	-	-	-	•	•	•	-


Legenda • available - not available

4 Choose Hall Sensor for SKA DDR
 00: No Hall Sensor
 01: Hall Sensor (available for models 148-245-335)

5 Standard connection 14: M23 connector type

6 Choose an option: 96: PT 1000 thermal sensor

SKA DDR POWER PACK MOTOR TYPE DESIGNATION

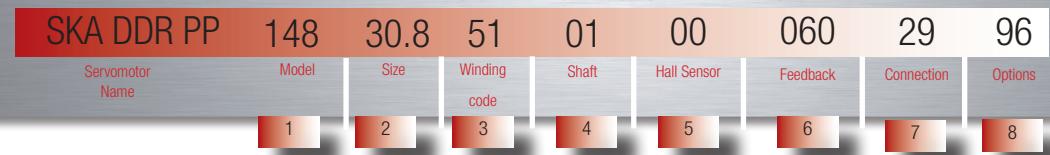

1 Choose SKA DDR model among 090 - 148 - 245 - 335 - 430

2 Choose SKA DDR size among
 30-60-90 for model 90
 30-60-90-120-150-240 for model 148
 30-60-90-120 for model 245
 30-60-90-120-150 for model 335
 30-60-90-120-150 -180 for model 430

3	Winding Code	17	18	19	50	51	52	53	54	55	56
Motor											
SKA DDR 090.30.2	•	•	•	•	-	-	-	-	-	-	-
SKA DDR 090.60.3,5	•	•	•	•	-	-	-	-	-	-	-
SKA DDR 090.90.4,7	•	•	•	•	•	-	-	-	-	-	-
SKA DDR 148.30.8	•	•	•	•	•	•	•	-	-	-	-
SKA DDR 148.60.14	•	•	•	•	•	•	•	-	-	-	-
SKA DDR 148.90.20	•	•	•	•	•	•	•	•	-	-	-
SKA DDR 148.120.26	-	•	•	•	•	•	•	•	-	-	-
SKA DDR 148.150	-	-	•	•	•	•	•	•	-	-	•
SKA DDR 148.240	-	-	•	•	•	•	•	•	-	-	•
SKA DDR 245.30.41	-	-	•	•	•	•	•	•	-	-	-
SKA DDR 245.60.70	-	-	•	•	•	•	•	•	-	-	-
SKA DDR 245.90.93	-	-	-	-	•	•	•	•	-	-	-
SKA DDR 245.120.115	-	-	-	-	•	•	•	•	-	-	-
SKA DDR 335.30.100	-	-	-	-	•	•	•	•	•	-	-
SKA DDR 335.60.164	-	-	-	-	•	•	•	•	•	-	-
SKA DDR 335.90.220	-	-	-	-	•	•	•	•	•	•	-
SKA DDR 335.120.270	-	-	-	-	•	•	•	•	•	•	-
SKA DDR 335.150.320	-	-	-	-	•	•	•	•	•	•	-
SKA DDR 430.30.210	-	-	-	-	-	•	•	•	•	•	•
SKA DDR 430.60.340	-	-	-	-	-	•	•	•	•	•	•
SKA DDR 430.90.450	-	-	-	-	-	-	•	•	•	•	•
SKA DDR 430.120.560	-	-	-	-	-	-	•	•	•	•	-
SKA DDR 430.150.660	-	-	-	-	-	-	-	•	•	•	-
SKA DDR 430.180.760	-	-	-	-	-	-	-	•	•	•	-

Legenda • available - not available

4 Choose shaft version for SKA DDR among
 01: for through hollow shaft
 02: for male shaft
 03: for hollow shaft

5 Choose Hall Sensor or not for SKA DDR
 00: No Hall Sensor
 01: Hall Sensor (available for models 148-245-335)

6 Choose feedback for SKA DDR from available items at page 9 **7** **29:** Standard connection, contact us for checking others connections


8 Choose an option:
 96: for PT 1000 thermal sensor
 02: for brake (see specifications at page 50)

SKA DDR FEEDBACK DESCRIPTION

Order code	Feedback	Description	Motor				
			SKA DDR 090	SKA DDR 148	SKA DDR 245	SKA DDR 335	SKA DDR 430
01	Hall Sensor	5Vdc - TTL	-	•	•	•	-
004	Resolver size 21	2 poles	•	•	•	•	•
094	Resolver size 34	2 poles	•	•	•	•	•
022	OIH 48	2.000 ppr TTL	•	•	•	•	•
060	SEK 90 - hole Ø 40	Absolute singleturn Hiperface 11bit + 64ppr SinCos	•	•	•	•	•
063	SEK 160 - hole Ø 100	Absolute singleturn Hiperface 12bit + 128ppr SinCos	-	-	-	•	•
(*)	SEK 260 - hole Ø 200	Absolute singleturn Hiperface 13bit + 256ppr SinCos	-	-	-	-	•
026	SKS 36	Absolute singleturn Hiperface 12bit + 128ppr SinCos	•	•	-	-	-
056	SKM 36	Absolute multiturn Hiperface 12+12bit + 128ppr SinCos	•	•	-	-	-
029	SRS 50	Absolute singleturn Hiperface 15bit + 1024ppr SinCos	•	•	•	•	•
030	SRM 50	Absolute multiturn Hiperface 15+12bit + 1024ppr SinCos	•	•	•	•	•
015	ERN 1080	1.024ppr Sin Cos	•	•	•	•	•
014	ERN 1080	2.048ppr Sin Cos	•	•	•	•	•
054	ERN 1080	3.600ppr Sin Cos	•	•	•	•	•
061	EKM 36	DSL	•	•	-	-	-
062	EFM 50	DSL	•	•	•	•	•
058	ECN 1313	Absolute singleturn EnDat 01 13bit + 2048ppr SinCos	•	•	•	•	•
(*)	ECN 1325	Absolute singleturn EnDat 22 25bit (available as an option with functional safety)	•	•	•	•	•
051	EQN 1325	Absolute multiturn EnDat 01 13+12bit + 2048ppr SinCos	•	•	•	•	•
070	EQN 1337	Absolute multiturn EnDat 22 25+12bit (available as an option with functional safety)	•	•	•	•	•
055	ECN 113 - hole Ø 40	Absolute singleturn EnDat 01 13bit + 2048ppr SinCos	•	•	•	•	•
(*)	ECN 125 - hole Ø 40	Absolute singleturn EnDat 22 25bit	•	•	•	•	•
053	ERN 180 - hole Ø 40	5.000ppr Sin Cos	•	•	•	•	•

Legenda • available - not available

FLEXI PRO DRIVE TYPE

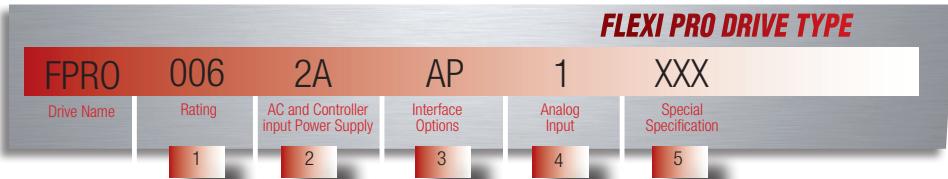

1

Rating		
	120/240 VAC	
	Cont. [A rms]	Peak [A rms]
1D5	1.5	4.5
003	3	9
4D5	4,5	18
006	6	18
008	8	28
010	10	28
013	13	28
020	20	48
024	24	48

Rating		
	400/480 VAC	
	Cont. [A rms]	Peak [A rms]
003	3	9
006	6	18
012	12	24
024	24	72
030	30	90

2

AC and Controller Input Power Supply		
2A	Input Single Phase 120L - L VAC +10% -15% 50/60Hz	
	Input Single Phase 240L - L VAC +10% -15% 50/60Hz	
	Input Three Phase 120 - 240L - L VAC +10% -15% 50/60Hz	
4D	AC Input Power Supply:	
	- Input Three Phase 400L - L VAC +10% -15% 50/60Hz	
	- Input Three Phase 480L - L VAC +10% -15% 50/60Hz	
	24VDC input for control board power supply	

3

Interface Options

AF - Analog Voltage/Pulse Train Ref & CANopen® & USB & RS 232
EC - EtherCAT

4

Analog Input

1 - One Analog input, 16 bit
2 - Two Analog inputs, 14 bit each



SKA DDR

**DIRECT DRIVE
TORQUE SERVOMOTORS
RATINGS AND
SPECIFICATIONS**

SKA DDR 090 RATINGS AND SPECIFICATIONS

TIME RATING	Continuous	AMBIENT TEMPERATURE	0 to 40 °C
INSULATION CLASS	F	AMBIENT HUMIDITY	20 to 80% RH (non condensing)
POLES	14	THERMAL PROTECTION	PT 1000
INSULATION SYSTEM UL / CSA	cURus , DV155J File nr.:E216686	CE certified	

SKA DDR 090.30.2.17 SKA DDR 090.30.2.18 SKA DDR 090.30.2.19 SKA DDR 090.30.2.50

Stall torque	Nm	2,0	2,0	2,0	2,0
Peak torque	Nm	15,9	15,9	14,3	10,5
Stall current	Arms	1,25	0,83	0,5	0,36
Peak current	Arms	14	9,3	4,8	2,1
Maximum speed @230 Vac 3phase	rpm	1200	1200	750	500
Maximum speed @400 Vac 3phase	rpm	-	-	1200	800
Torque constant ± 5%	Nm/Arms	1,14	1,71	3,0	5,0
Voltage constant ± 5%	Vrms/krpm	96	144	240	340
Phase/phase resistance ± 5%	Ohm	9,7	22,6	60	130
Phase/phase inductance	mH	21	48	140	250
Electrical time constant	msec	2,3	2,3	2,4	2,0
Thermal resistance	°C/W	3,2	3,2	3,2	3,2

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 225x225x8mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

SKA DDR 090.60.3.5.17 SKA DDR 090.60.3.5.18 SKA DDR 090.60.3.5.19 SKA DDR 090.60.3.5.50

Stall torque	Nm	3,5	3,5	3,5	3,5
Peak torque	Nm	28	28	28	21
Stall current	Arms	2,19	1,46	0,87	0,63
Peak current	Arms	26,9	17,8	11,2	5,46
Rated current	Arms				
Maximum speed @230 Vac 3phase	rpm	1200	1200	750	500
Maximum speed @400 Vac 3phase	rpm	-	-	1200	800
Torque constant ± 5%	Nm/Arms	1,04	1,57	2,50	3,85
Voltage constant ± 5%	Vrms/krpm	96	144	240	340
Phase/phase resistance ± 5%	Ohm	3,9	8,9	32,4	47
Phase/phase inductance	mH	12	27	72	142
Electrical time constant	msec	3,0	3,0	3,0	3,0
Thermal resistance	°C/W	2,6	2,6	2,6	2,6

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 225x225x8mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

SEE IT BEFORE IT HAPPENS



SKA DDR 090 RATINGS AND SPECIFICATIONS

TIME RATING	Continuous	AMBIENT TEMPERATURE	0 to 40 °C
INSULATION CLASS	F	AMBIENT HUMIDITY	20 to 80% RH (non condensing)
POLES	14	THERMAL PROTECTION	PT 1000
INSULATION SYSTEM UL /CSA	cURus , DV155J File nr.:E216686	CE certified	


		SKA DDR 090.90.4,7.17	SKA DDR 090.90.4,7.18	SKA DDR 090.90.4,7.19	SKA DDR 090.90.4,7.50	SKA DDR 090.90.4,7.51
Stall torque	Nm	4,7	4,7	4,7	4,7	4,7
Peak torque	Nm	40	40	40	30	19
Stall current	Arms	2,94	1,96	1,17	0,84	0,50
Peak current	Arms	38	26	16	8,0	2,8
Maximum speed @230 Vac 3phase	rpm	1200	1200	750	500	300
Maximum speed @400 Vac 3phase	rpm	-	-	1200	800	500
Torque constant ± 5%	Nm/Arms	1,05	1,54	2,50	3,75	6,8
Voltage constant ± 5%	Vrms/krpm	96	144	240	340	570
Phase/phase resistance ± 5%	Ohm	3,5	7	19,2	40	115
Phase/phase inductance	mH	9,9	20	54	120	345
Electrical time constant	msec	3,3	3,0	2,9	3,0	3,0
Thermal resistance	°C/W	2,1	2,1	2,1	2,1	2,1

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 225x225x8mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.


SKA DDR 090 DIMENSIONS AND CONFIGURATIONS

SKA DDR 090 FRAMELESS reference drawing 02

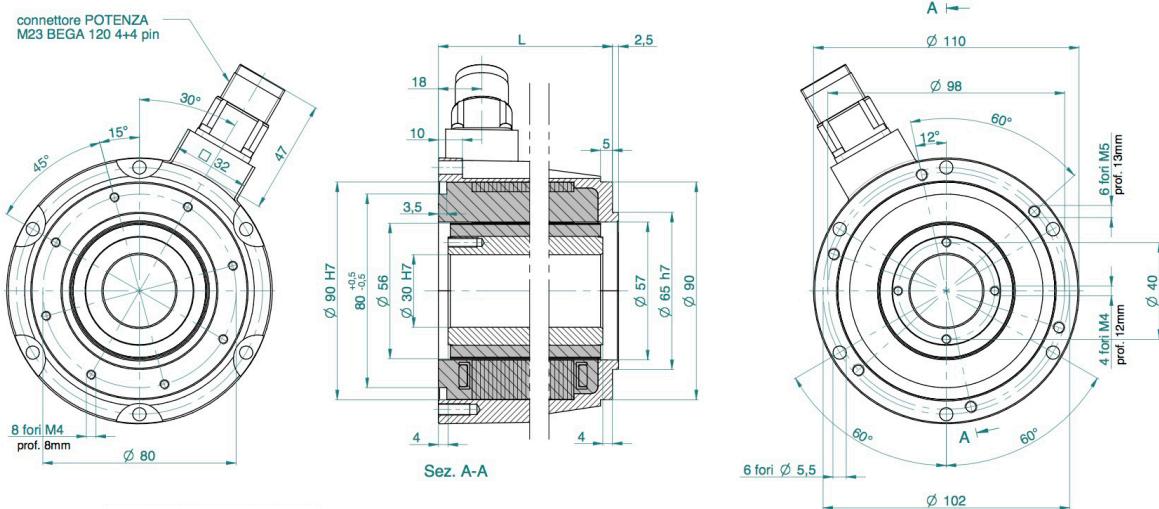

MOTOR TYPE	L (mm)
SKA DDR 090.30	60
SKA DDR 090.60	90
SKA DDR 090.90	120

SKA DDR 090.30 POWER PACK HOLLOW SHAFT reference drawing 03

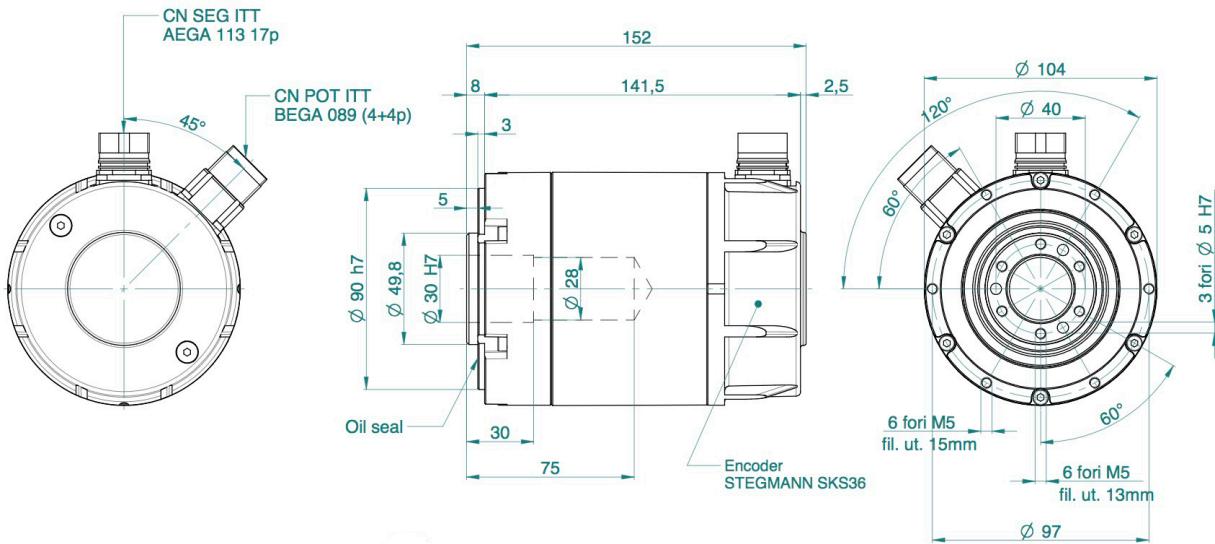


SEE IT BEFORE IT HAPPENS


**MOTOR
POWER**
COMPANY

SKA DDR 090 DIMENSIONS AND CONFIGURATIONS

SKA DDR 090.60 POWER PACK MALE SHAFT reference drawing 04

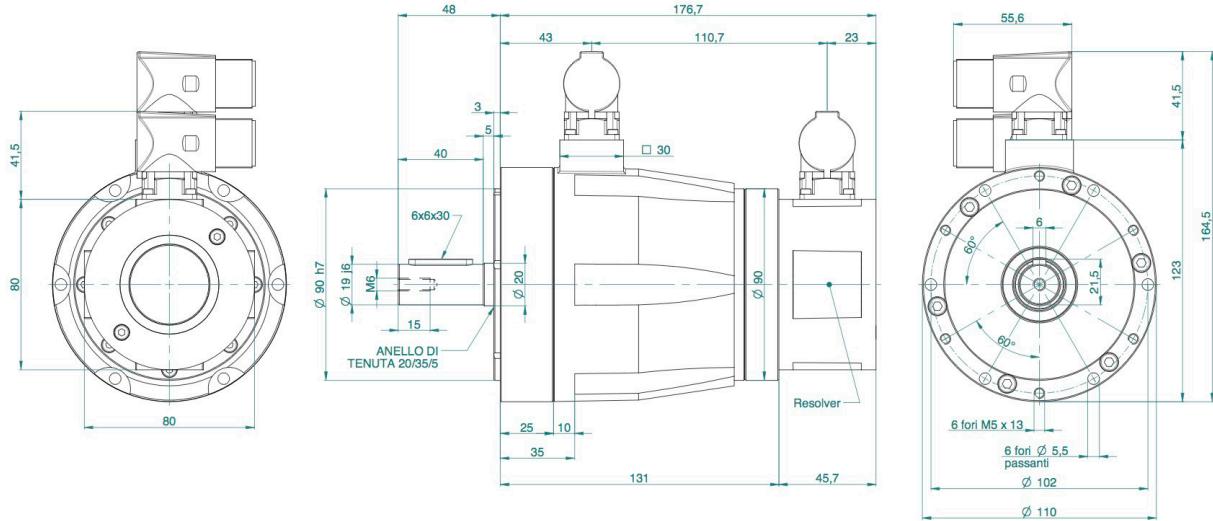


SKA DDR 090.90 POWER PACK THROUGH HOLLOW SHAFT reference drawing 05

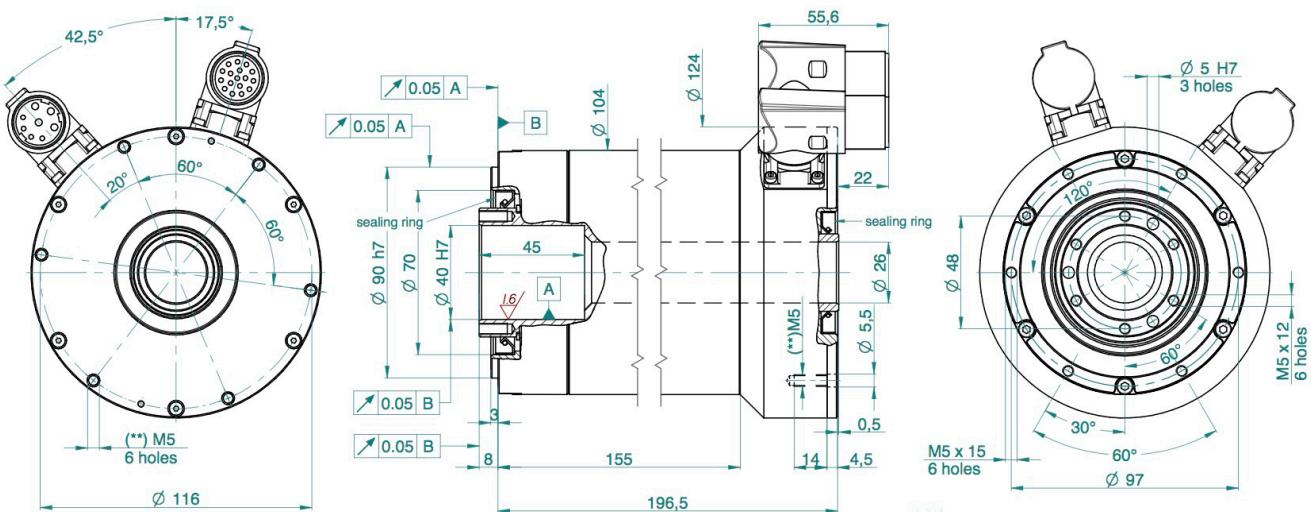


SKA DDR 090 DIMENSIONS AND CONFIGURATIONS

SKA DDR 090.30 POWER PACK HOLLOW SHAFT AND BRAKE reference drawing 06

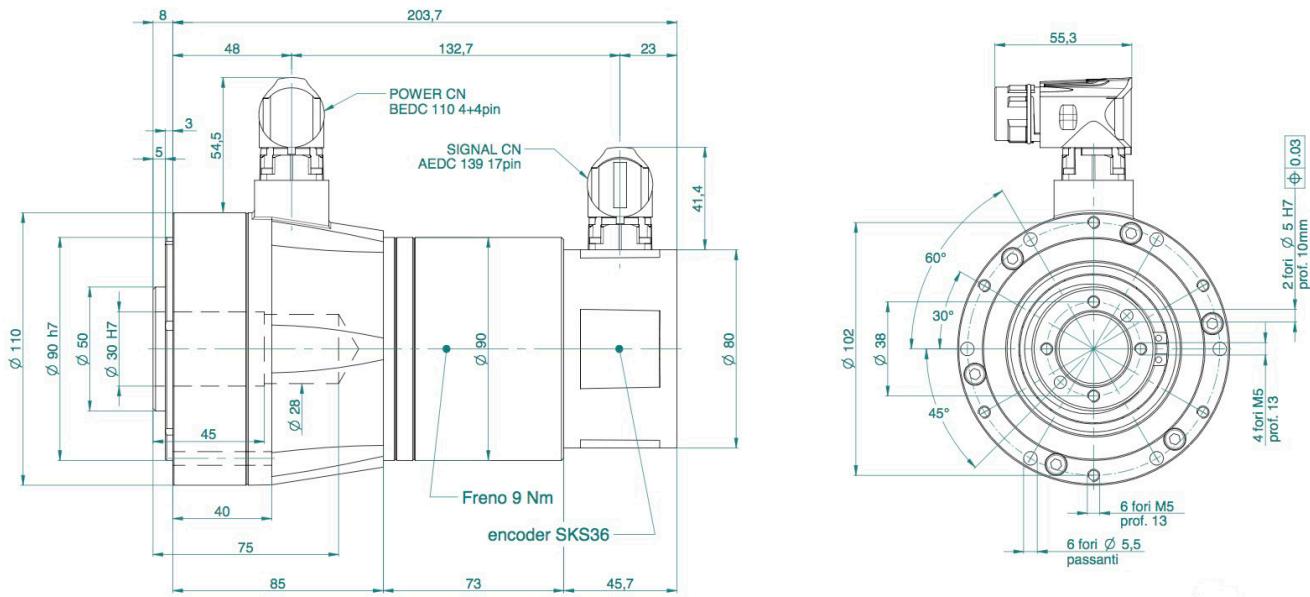


SKA DDR 090.60 POWER PACK HOLLOW SHAFT AND BRAKE reference drawing 07

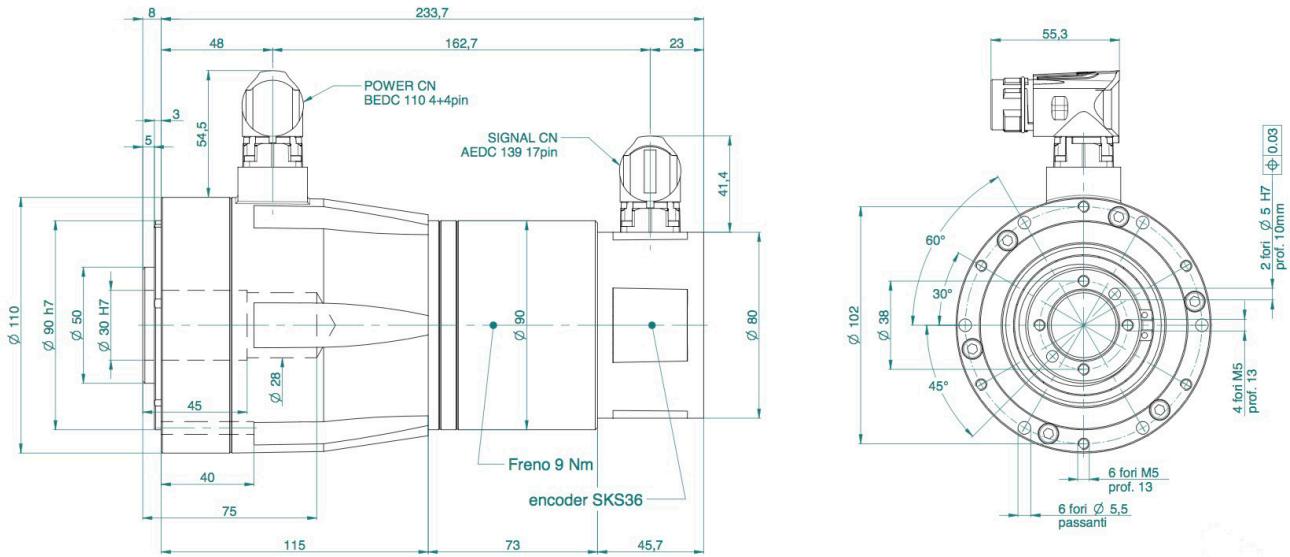


SKA DDR 090 DIMENSIONS AND CONFIGURATIONS

SKA DDR 090.90 POWER PACK HOLLOW SHAFT AND BRAKE reference drawing 08

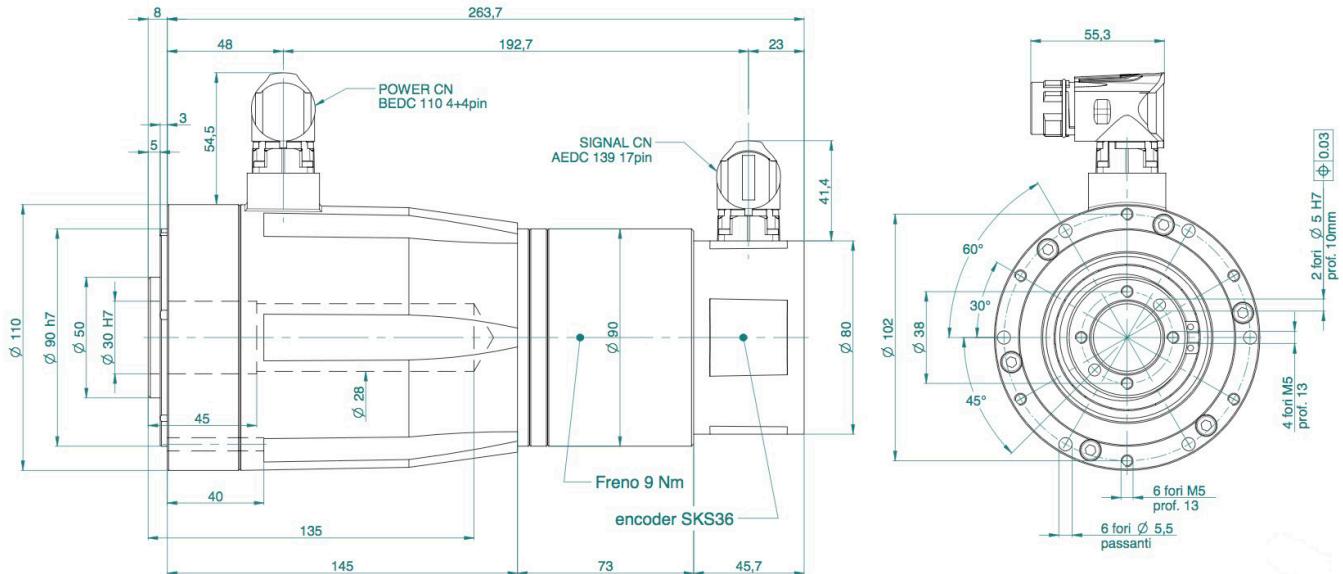


SKA DDR 090 TORQUE AND SPEED CHARTS

SKA DDR 090.90.18 400 Vac

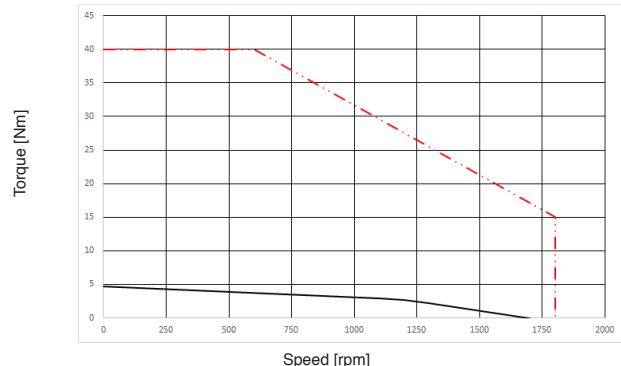

SKA DDR 090.90.19 400 Vac

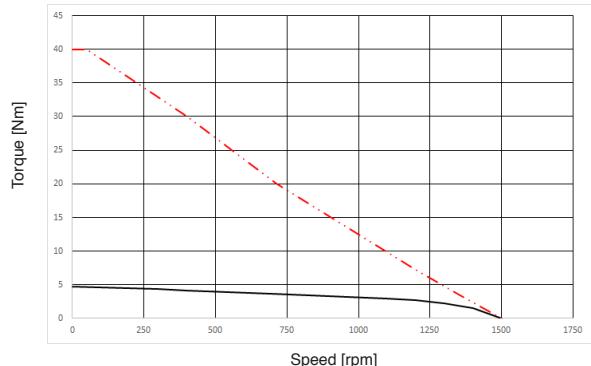

— CONTINUOUS DUTY @ RATED VOLTAGE

··· INTERMITTENT DUTY @ RATED VOLTAGE

SKA DDR 148 RATINGS AND SPECIFICATIONS

TIME RATING	Continuous	AMBIENT TEMPERATURE	0 to 40 °C
INSULATION CLASS	F	AMBIENT HUMIDITY	20 to 80% RH (non condensing)
POLES	14	THERMAL PROTECTION	PT 1000
INSULATION SYSTEM UL / CSA	cURus , DV155J File nr.:E216686	CE certified	

	SKA DDR 148.30.8.17	SKA DDR 148.30.8.18	SKA DDR 148.30.8.19	SKA DDR 148.30.8.50	SKA DDR 148.30.8.51	SKA DDR 148.30.8.52
--	--------------------------------	--------------------------------	--------------------------------	--------------------------------	--------------------------------	--------------------------------

Stall torque	Nm	8	8	8	8	8
Peak torque	Nm	35	35	35	35	24
Stall current	Arms	5,00	3,33	2,00	1,43	0,85
Peak current	Arms	26,9	18,0	10,7	7,71	4,60
Maximum speed @230 Vac 3phase	rpm	1000	1000	750	500	300
Maximum speed @400 Vac 3phase	rpm	-	-	1000	800	500
Torque constant ± 5%	Nm/Arms	1,30	1,94	3,26	4,54	7,61
Voltage constant ± 5%	Vrms/krpm	96	144	240	340	570
Phase/phase resistance ± 5%	Ohm	1,2	3,60	6,2	11,8	39,1
Phase/phase inductance	mH	3,85	12,6	23	50	140
Electrical time constant	msec	3,5	3,5	3,5	3,5	3,5
Thermal resistance	°C/W	1,21	1,21	1,21	1,21	1,21

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a front temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 370x370x10mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

	SKA DDR 148.60.14.17	SKA DDR 148.60.14.18	SKA DDR 148.60.14.19	SKA DDR 148.60.14.50	SKA DDR 148.60.14.51	SKA DDR 148.60.14.52
--	---------------------------------	---------------------------------	---------------------------------	---------------------------------	---------------------------------	---------------------------------

Stall torque	Nm	14	14	14	14	14
Peak torque	Nm	72	72	72	72	65
Stall current	Arms	8,75	5,83	3,50	2,50	1,49
Peak current	Arms	55,4	37,1	22,1	15,9	9,5
Maximum speed @230 Vac 3phase	rpm	1000	1000	750	500	300
Maximum speed @400 Vac 3phase	rpm	-	-	1000	800	500
Torque constant ± 5%	Nm/Arms	1,30	1,94	3,26	4,54	7,61
Voltage constant ± 5%	Vrms/krpm	96	144	240	340	570
Phase/phase resistance ± 5%	Ohm	0,53	1,25	2,8	4,9	15,6
Phase/phase inductance	mH	2	4	13	21	67
Electrical time constant	msec	4,9	4,9	4,9	4,8	4,9
Thermal resistance	°C/W	1,13	1,13	1,13	1,13	1,13

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 370x370x10mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

SKA DDR 148 RATINGS AND SPECIFICATIONS

TIME RATING	Continuous	AMBIENT TEMPERATURE	0 to 40 °C
INSULATION CLASS	F	AMBIENT HUMIDITY	20 to 80% RH (non condensing)
POLES	14	THERMAL PROTECTION	PT 1000
INSULATION SYSTEM UL / CSA	cURus , DV155J File nr.:E216686	CE certified	

		SKA DDR 148.90.20.17	SKA DDR 148.90.20.18	SKA DDR 148.90.20.19	SKA DDR 148.90.20.50	SKA DDR 148.90.20.51	SKA DDR 148.90.20.52	SKA DDR 148.90.20.53
Stall torque	Nm	20	20	20	20	20	20	20
Peak torque	Nm	106	106	106	106	106	90	60
Stall current	Arms	12,5	8,33	5,00	3,57	2,13	1,27	0,64
Peak current	Arms	81,5	54,6	32,5	23,3	13,9	6,85	2,1
Maximum speed @230 Vac 3phase	rpm	900	900	750	500	300	180	-
Maximum speed @400 Vac 3phase	rpm	-	-	-	800	500	300	150
Torque constant ± 5%	Nm/Arms	1,30	1,94	3,26	4,54	7,61	13,7	28,8
Voltage constant ± 5%	Vrms/krpm	96	144	240	340	570	950	1900
Phase/phase resistance ± 5%	Ohm	0,33	0,70	2,05	3,5	11,0	27,3	136
Phase/phase inductance	mH	1,6	3,6	9,5	17	62	125	632
Electrical time constant	msec	5,0	5,1	5,6	5,6	5,6	5,2	4,7
Thermal resistance	°C/W	0,94	0,94	0,94	0,94	0,94	0,94	0,94

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 370x370x10mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

		SKA DDR 148.120.26.18	SKA DDR 148.120.26.19	SKA DDR 148.120.26.50	SKA DDR 148.120.26.51	SKA DDR 148.120.26.52	SKA DDR 148.120.26.53
Stall torque	Nm	26	26	26	26	26	26
Peak torque	Nm	141	141	141	141	141	85
Stall current	Arms	10,8	6,50	4,64	2,77	1,66	0,83
Peak current	Arms	72,7	43,3	31,1	18,5	11,1	2,95
Maximum speed @230 Vac 3phase	rpm	900	750	500	300	180	-
Maximum speed @400 Vac 3phase	rpm	-	-	800	500	300	150
Torque constant ± 5%	Nm/Arms	1,94	3,26	4,54	7,61	13,7	28,8
Voltage constant ± 5%	Vrms/krpm	144	240	340	570	950	1900
Phase/phase resistance ± 5%	Ohm	0,50	1,38	3,0	7,80	22,5	87
Phase/phase inductance	mH	3,0	8,3	15	35	115	524
Electrical time constant	msec	6,0	6,0	6,1	6,0	6,0	6,0
Thermal resistance	°C/W	0,79	0,79	0,79	0,79	0,79	0,79

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 370x370x10mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

SEE IT BEFORE IT HAPPENS



SKA DDR 148 RATINGS AND SPECIFICATIONS

TIME RATING	Continuous	AMBIENT TEMPERATURE	0 to 40 °C
INSULATION CLASS	F	AMBIENT HUMIDITY	20 to 80% RH (non condensing)
POLES	14	THERMAL PROTECTION	PT 1000
INSULATION SYSTEM UL / CSA	cURus , DV155J File nr.:E216686	CE certified	

	SKA DDR 148.150.30.19	SKA DDR 148.150.30.50	SKA DDR 148.150.30.51	SKA DDR 148.150.30.52	SKA DDR 148.150.30.56	SKA DDR 148.150.30.53
--	--	--	--	--	--	--

Stall torque	Nm	30	30	30	30	30
Peak torque	Nm	170	170	170	125	95
Stall current	Arms	7,5	5,6	3,2	1,91	1,29
Peak current	Arms	53	37,8	22,4	13,4	6,1
Maximum speed @230 Vac 3phase	rpm	750	500	300	180	-
Maximum speed @400 Vac 3phase	rpm	-	800	500	300	200
Torque constant ± 5%	Nm/Arms	3,2	4,5	7,59	12,7	20,5
Voltage constant ± 5%	Vrms/krpm	240	340	570	950	1400
Phase/phase resistance ± 5%	Ohm	1,17	2,4	6,64	19,1	40
Phase/phase inductance	mH	6,4	13	38	106	230
Electrical time constant	msec	5,5	5,4	5,7	5,5	5,3
Thermal resistance	°C/W	0,72	0,72	0,72	0,72	0,72

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 370x370x10mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

	SKA DDR 148.240.48.19	SKA DDR 148.240.48.50	SKA DDR 148.240.48.51	SKA DDR 148.240.48.52	SKA DDR 148.240.48.56	SKA DDR 148.240.48.53
--	--	--	--	--	--	--




Stall torque	Nm	48	48	48	48	48
Peak torque	Nm	260	260	260	260	211
Stall current	Arms	12	8,53	5,09	3,05	2,07
Peak current	Arms	81,3	57,8	32,3	20,5	10,3
Maximum speed @230 Vac 3phase	rpm	750	500	300	180	-
Maximum speed @400 Vac 3phase	rpm	-	800	500	300	200
Torque constant ± 5%	Nm/Arms	3,2	4,5	7,59	12,7	20,5
Voltage constant ± 5%	Vrms/krpm	240	340	570	950	1400
Phase/phase resistance ± 5%	Ohm	0,73	1,48	4,12	11,6	25,3
Phase/phase inductance	mH	4,72	9,63	26,8	75,5	165
Electrical time constant	msec	6,5	6,5	6,5	6,5	6,5
Thermal resistance	°C/W	0,46	0,46	0,46	0,46	0,46

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 370x370x10mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.




SKA DDR 148 DIMENSIONS AND CONFIGURATIONS

SKA DDR 148 FRAMELESS reference drawing 102

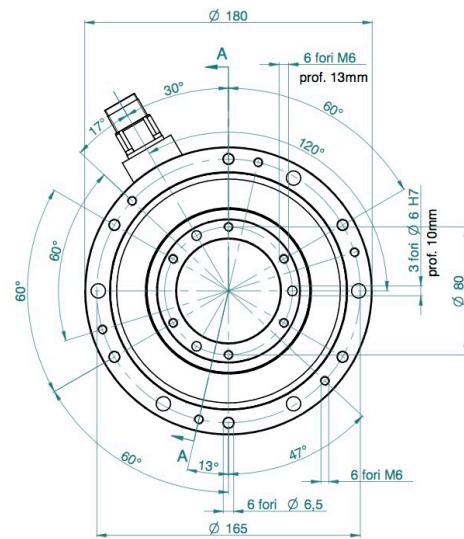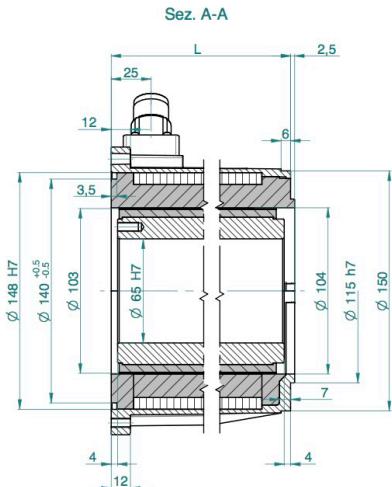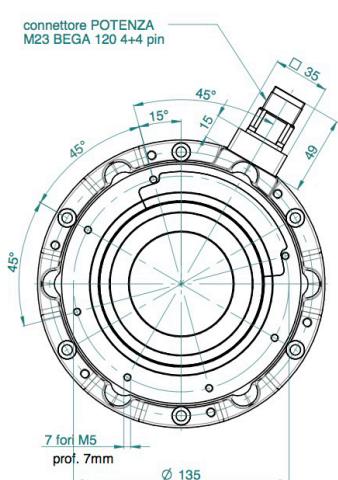

MOTOR TYPE	L (mm)
SKA DDR 148.30	62
SKA DDR 148.60	92
SKA DDR 148.90	122
SKA DDR 148.120	152


SKA DDR 148 FRAMELESS AND HALL SENSORS reference drawing 103

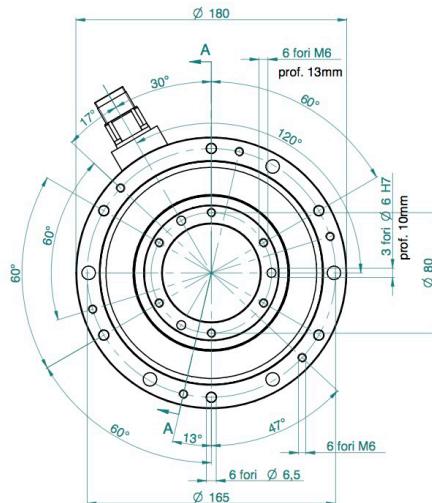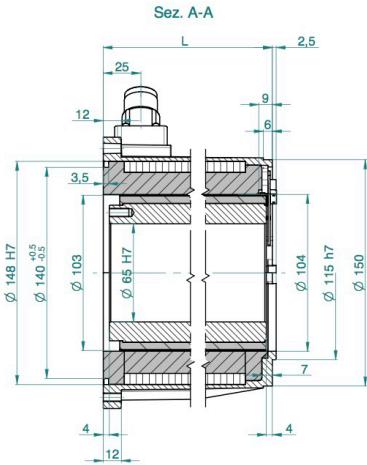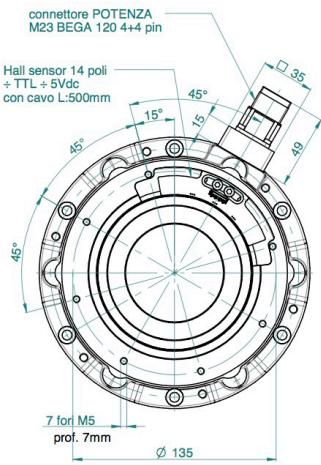

MOTOR TYPE	L (mm)
SKA DDR 148.30	62
SKA DDR 148.60	92
SKA DDR 148.90	122
SKA DDR 148.120	152


SKA DDR 148 DIMENSIONS AND CONFIGURATIONS

SKA DDR 148 POWER PACK MALE SHAFT reference drawing 104

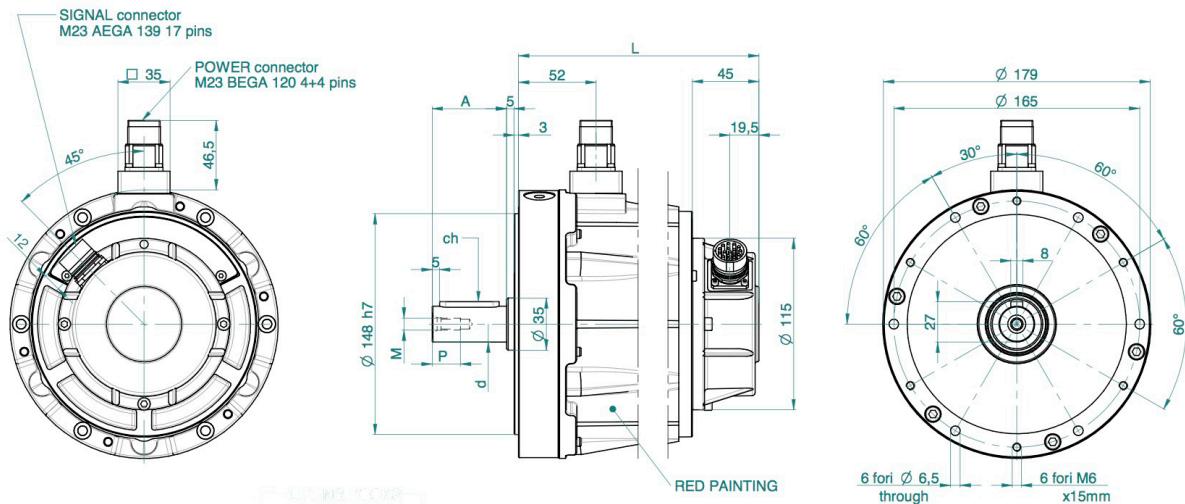

MOTOR TYPE	L (mm)	d (j6)	A	M	P	ch
SKA DDR 148.30	146	24	50	M8	19	8x7x40
SKA DDR 148.60	176	24	50	M8	19	8x7x40
SKA DDR 148.90	206	24	50	M8	19	8x7x40
SKA DDR 148.120	236	28	60	M10	22	8x7x50


SKA DDR 148 POWER PACK HOLLOW SHAFT reference drawing 105

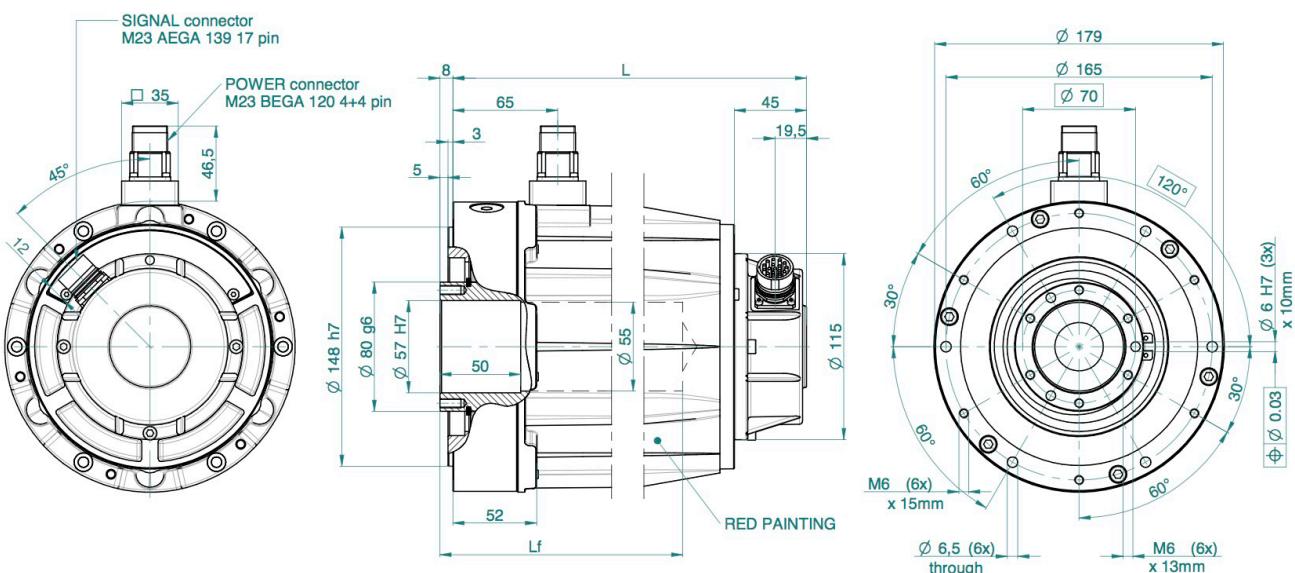


MOTOR TYPE	L (mm)	Lf (mm)
SKA DDR 148.30	159	90
SKA DDR 148.60	189	120
SKA DDR 148.90	219	150
SKA DDR 148.120	249	180

SKA DDR 148 DIMENSIONS AND CONFIGURATIONS

SKA DDR POWER PACK 148 30 THROUGH HOLLOW SHAFT reference drawing 106

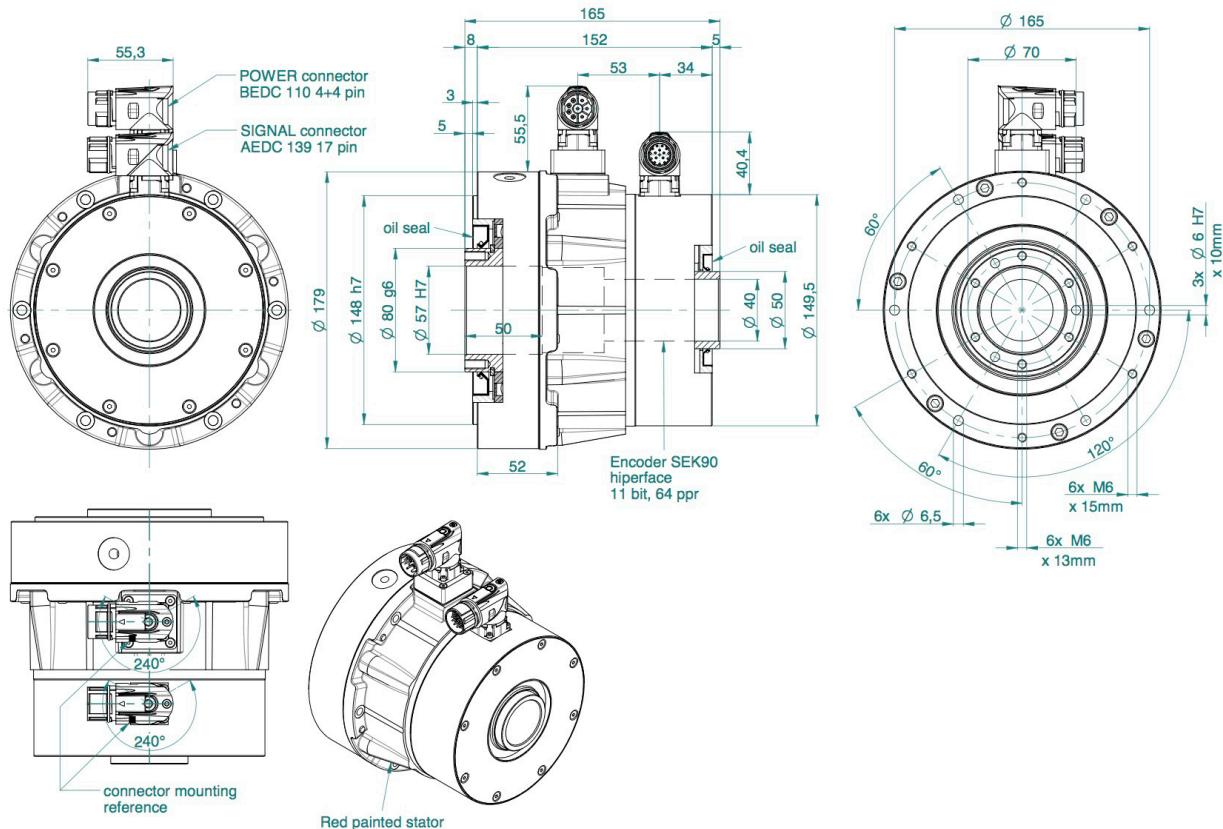

SKA DDR 148 120 POWER PACK THROUGH HOLLOW SHAFT reference drawing 107

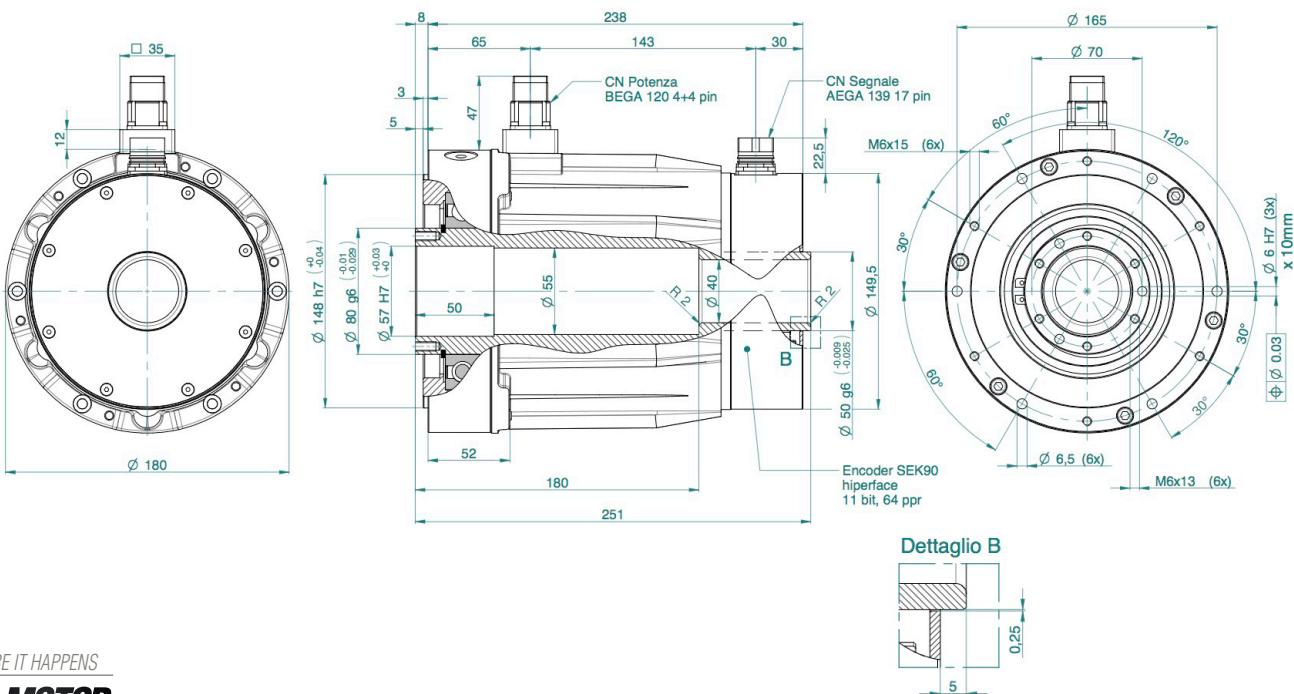


SEE IT BEFORE IT HAPPENS


**MOTOR
POWER**
COMPANY

SKA DDR 148 DIMENSIONS AND CONFIGURATIONS

SKA DDR 148 150 POWER PACK MALE SHAFT reference drawing 108

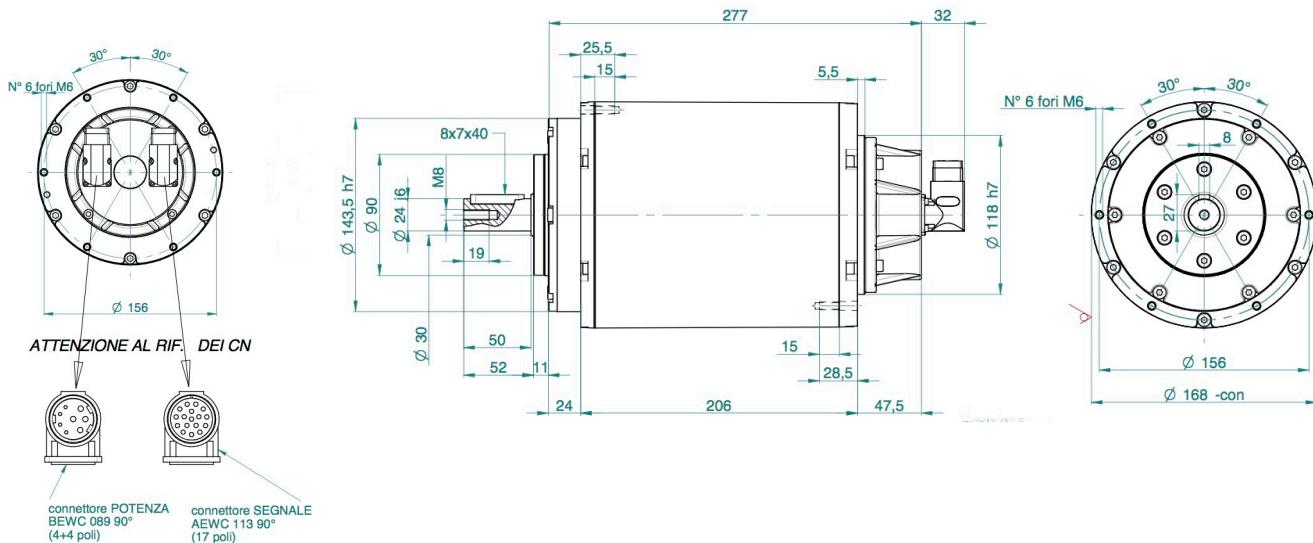


SKA DDR 148 150 POWER PACK HOLLOW SHAFT reference drawing 109

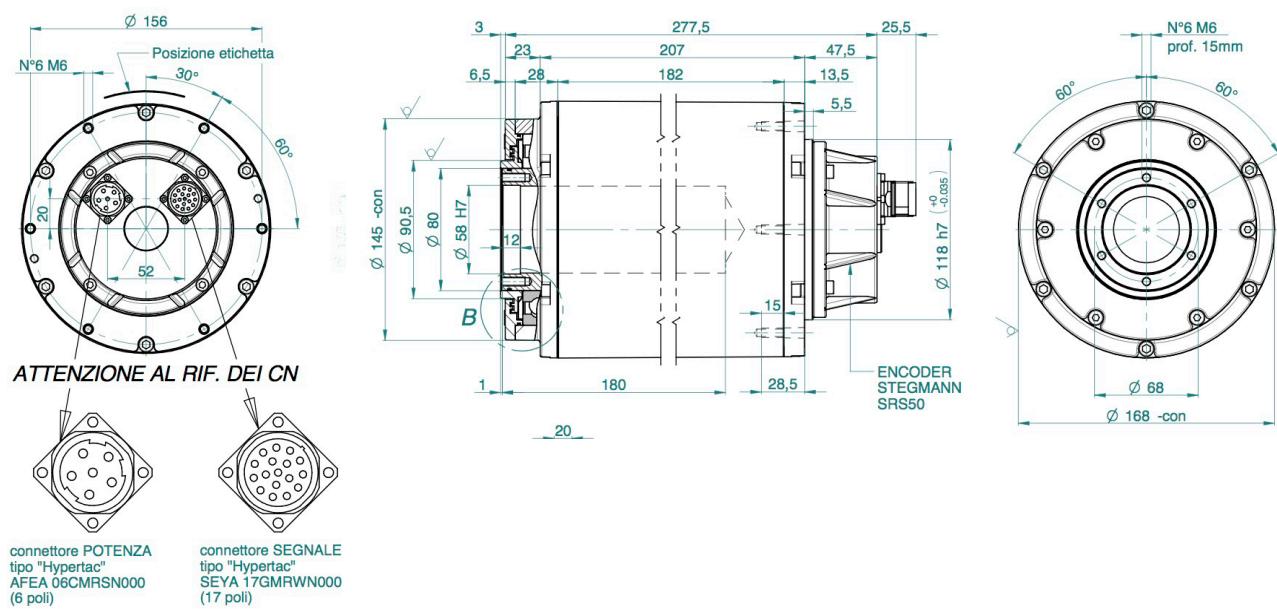


SKA DDR 148 DIMENSIONS AND CONFIGURATIONS

SKA DDR 148 240 POWER PACK MALE SHAFT reference drawing 110

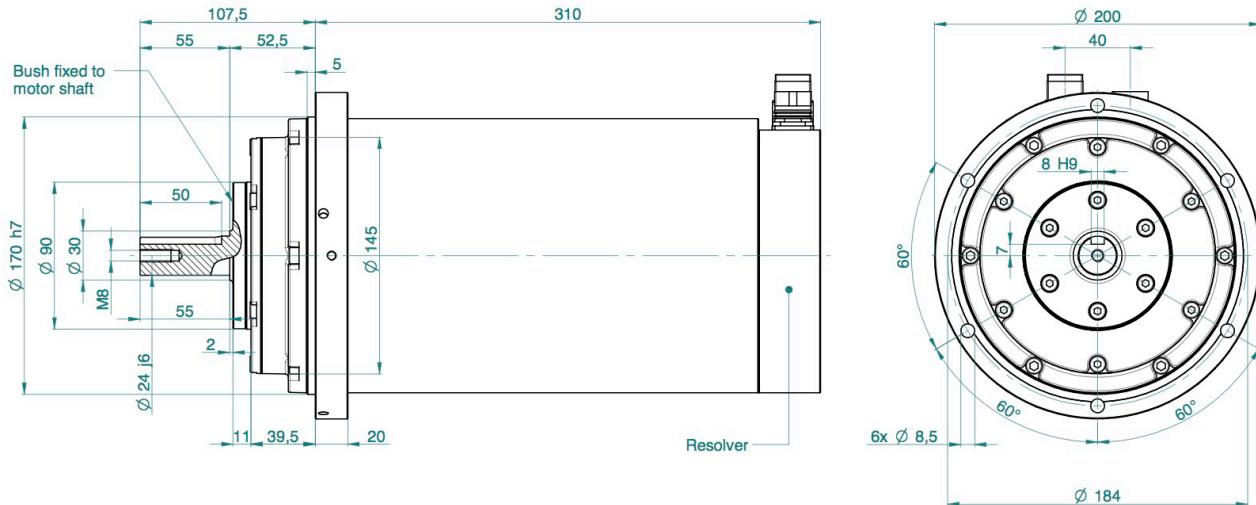


SKA DDR 148 240 POWER PACK HOLLOW SHAFT reference drawing 111

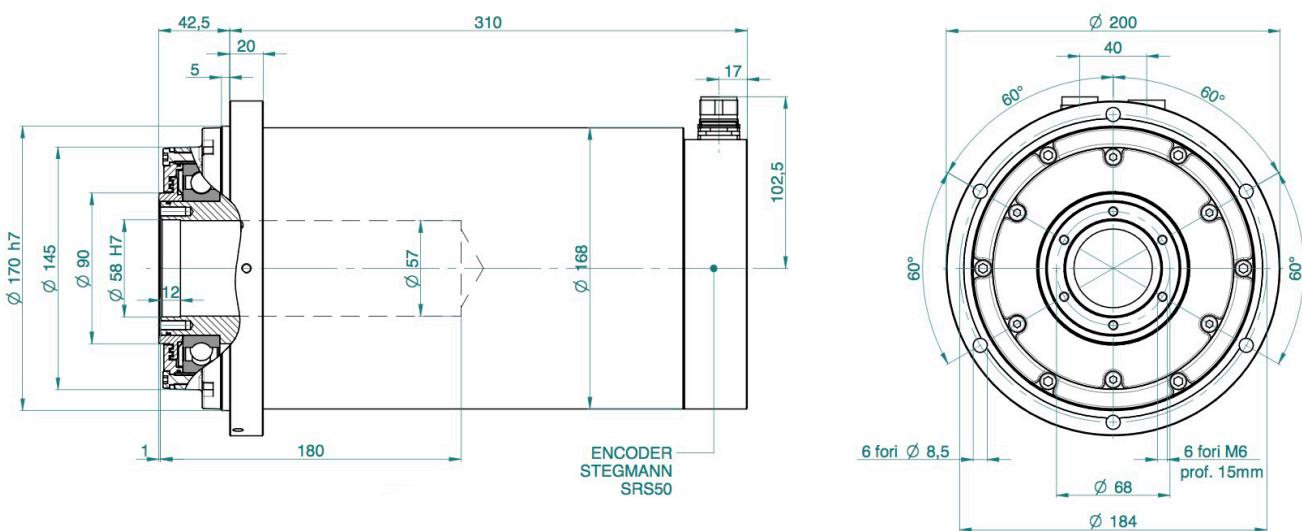


SKA DDR 148 DIMENSIONS AND CONFIGURATIONS

SKA DDR 148 POWER PACK MALE SHAFT AND BRAKE reference drawing 112

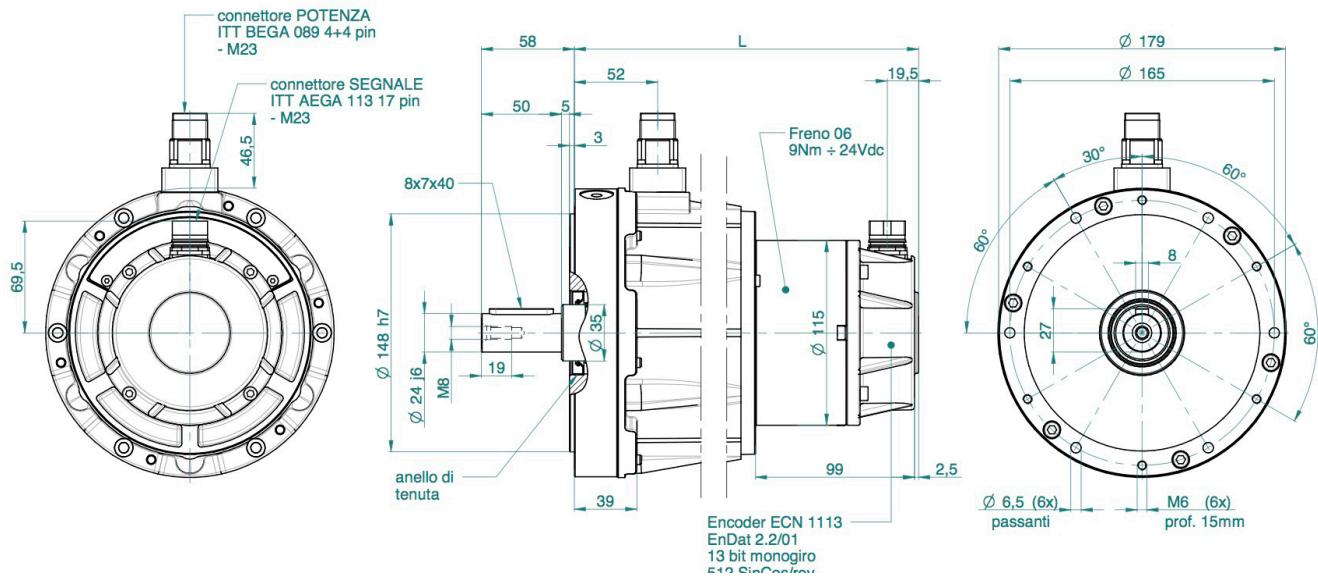


MOTOR TYPE	L (mm)
SKA DDR 148.30	203
SKA DDR 148.60	233
SKA DDR 148.90	263
SKA DDR 148.120	293

SKA DDR 148 30 POWER PACK HOLLOW SHAFT AND BRAKE reference drawing 113

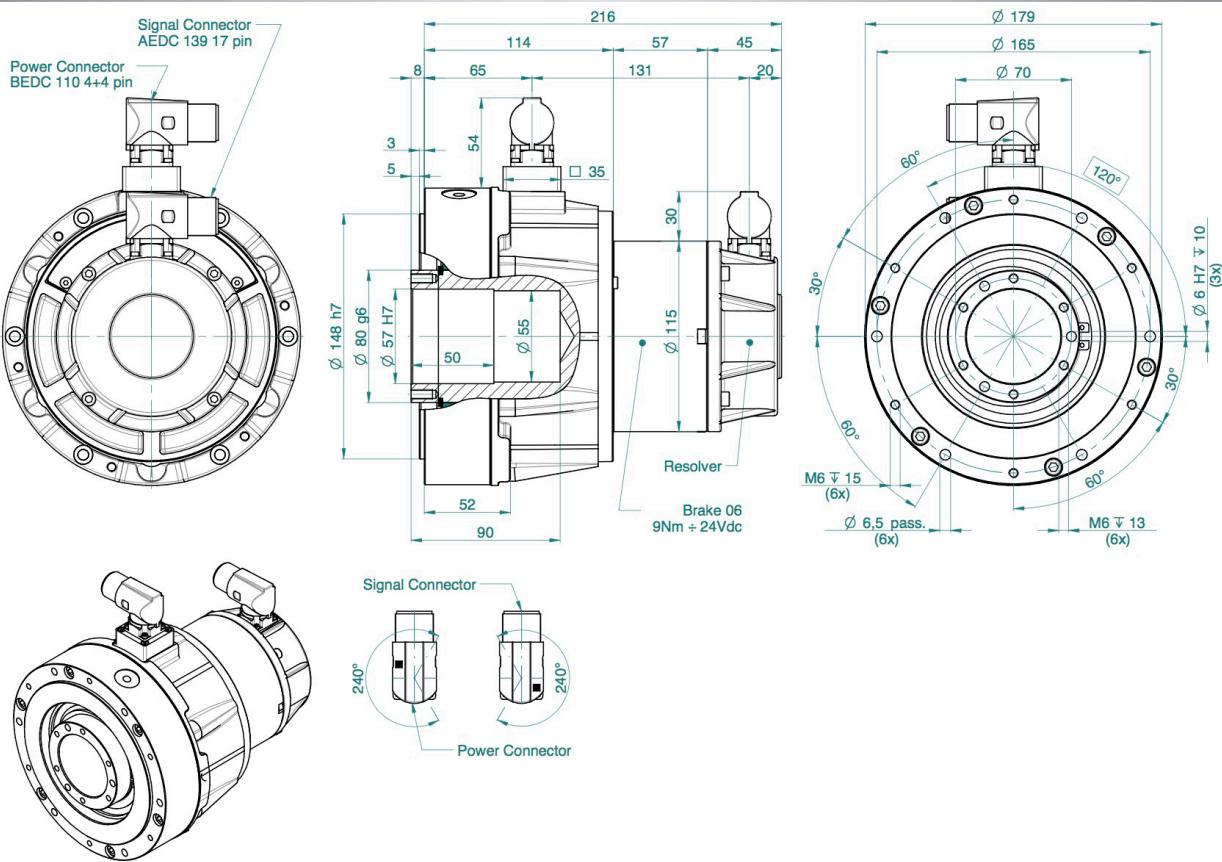


SKA DDR 148 DIMENSIONS AND CONFIGURATIONS

SKA DDR 148 60 POWER PACK THROUGH HOLLOW SHAFT AND BRAKE reference drawing 114

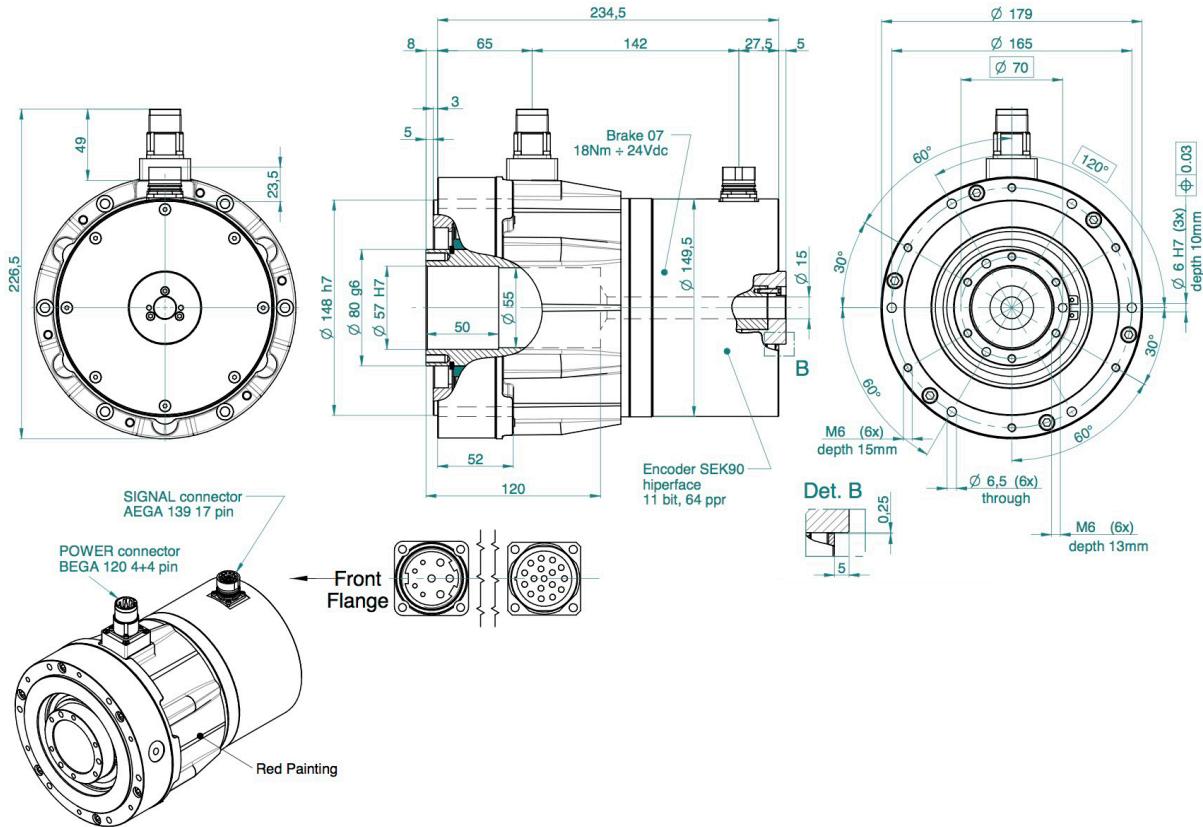

SKA DDR 148 POWER PACK HOLLOW SHAFT AND BRAKE reference drawing 115

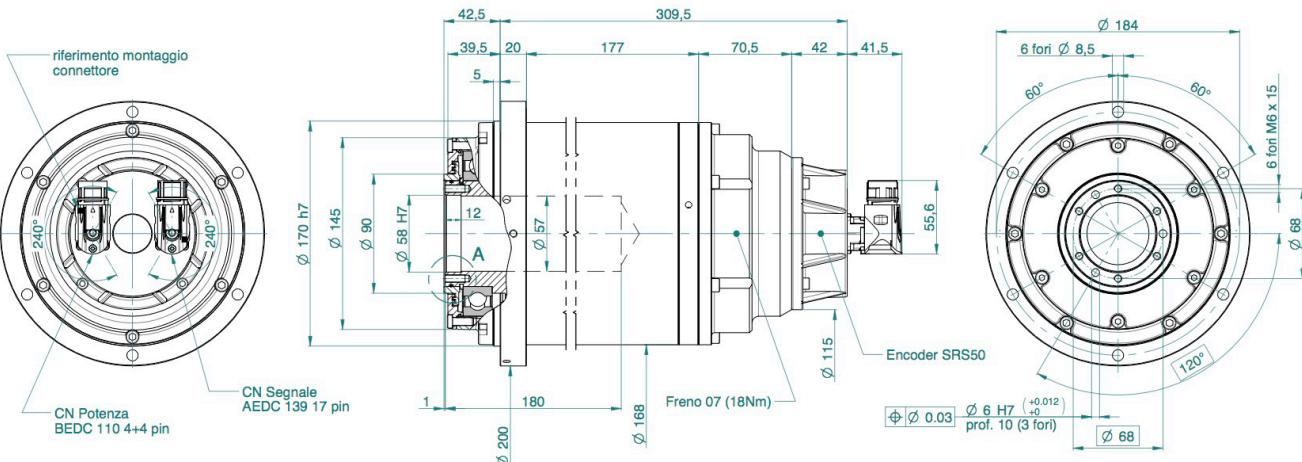


SEE IT BEFORE IT HAPPENS

**MOTOR
POWER**
COMPANY


SKA DDR 148 DIMENSIONS AND CONFIGURATIONS

SKA DDR 148 240 POWER PACK MALE SHAFT AND BRAKE reference drawing 116

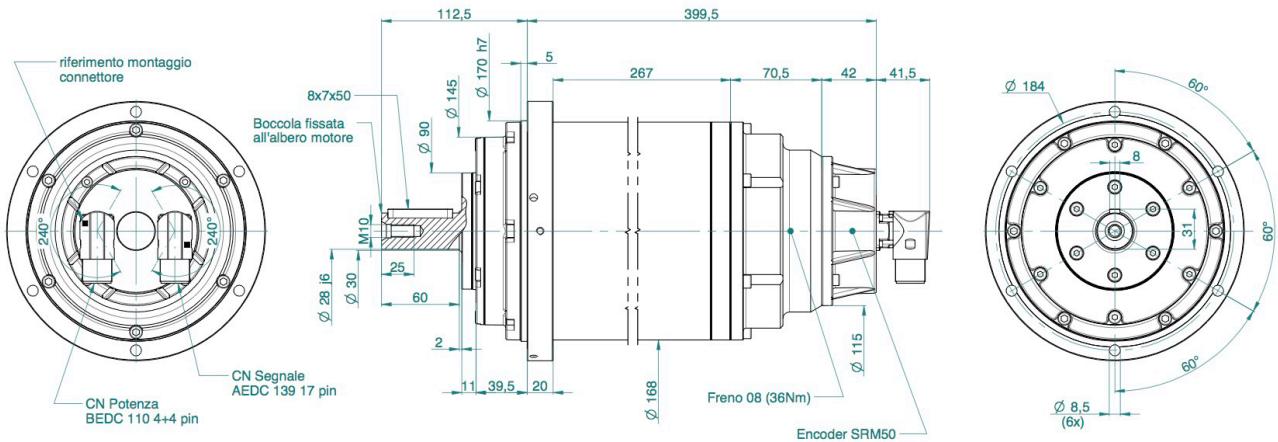


SKA DDR 148 TORQUE AND SPEED CHARTS


SKA DDR 148.60.19 230 Vac

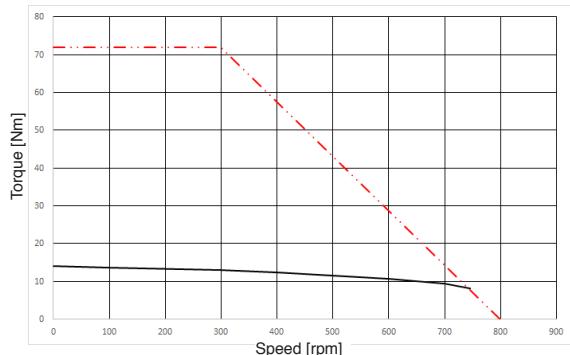


SKA DDR 148.60.50 230 Vac

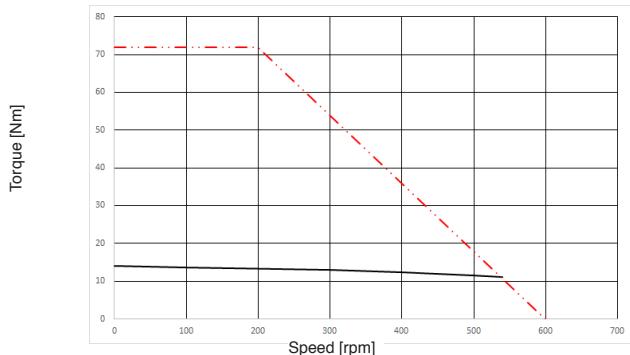


SKA DDR 148.60.50 400 Vac

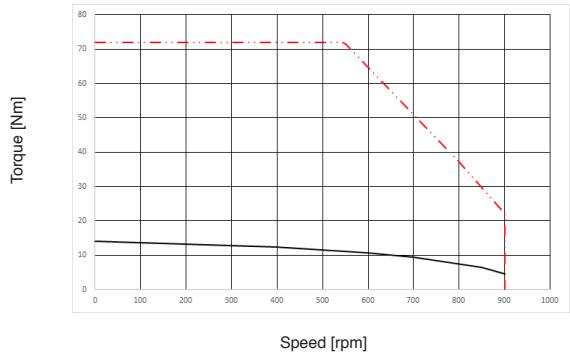


SKA DDR 148.120.19 400 Vac

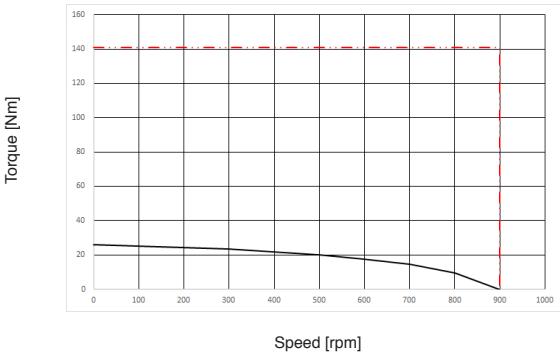



SKA DDR 148.150.19 400 Vac

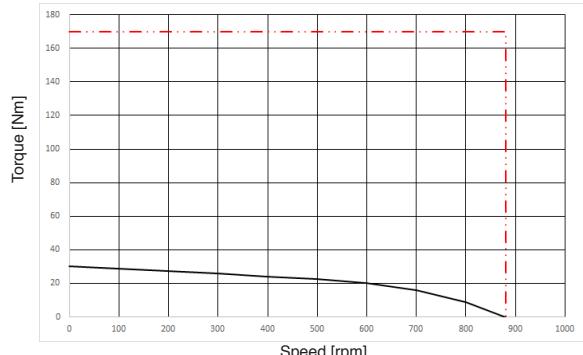

SKA DDR 148.150.50 400 Vac

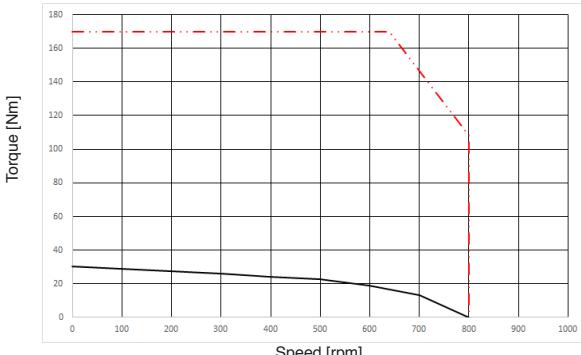

SKA DDR 148.240.19 400 Vac

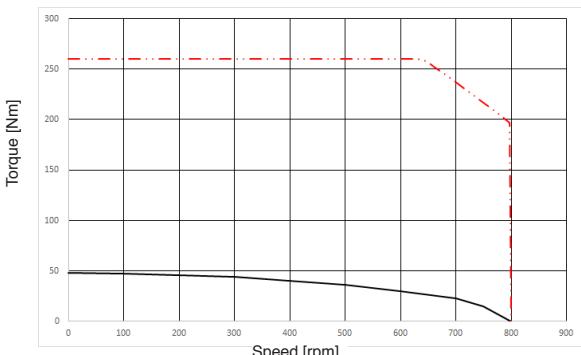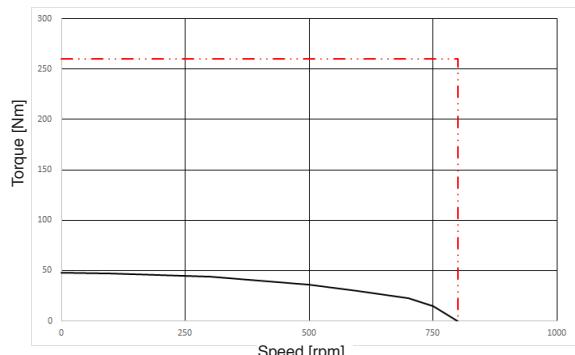

— CONTINUOUS DUTY @ RATED VOLTAGE

— DASHED RED LINE = INTERMITTENT DUTY @ RATED VOLTAGE

SKA DDR 245 RATINGS AND SPECIFICATIONS

TIME RATING	Continuous	AMBIENT TEMPERATURE	0 to 40 °C
INSULATION CLASS	F	AMBIENT HUMIDITY	20 to 80% RH (non condensing)
POLES	28	THERMAL PROTECTION	PT 1000
INSULATION SYSTEM UL / CSA	cURus , DV155J File nr.:E216686	CE certified	

		SKA DDR 245.30.41.19	SKA DDR 245.30.41.50	SKA DDR 245.30.41.51	SKA DDR 245.30.41.52	SKA DDR 245.30.41.53
Stall torque	Nm	41	41	41	41	41
Peak torque	Nm	128	128	128	128	128
Stall current	Arms	10,3	7,32	4,36	2,61	1,31
Peak current	Arms	38,6	27,4	16,1	9,7	4,8
Maximum speed @230 Vac 3phase	rpm	750	500	300	180	90
Maximum speed @400 Vac 3phase	rpm	-	800	500	300	90
Torque constant ± 5%	Nm/Arms	3,3	4,7	7,9	13,2	26,4
Voltage constant ± 5%	Vrms/krpm	240	340	570	950	1900
Phase/phase resistance ± 5%	Ohm	0,76	1,6	4,2	12,5	44
Phase/phase inductance	mH	8,0	15	42	106	370
Electrical time constant	msec	10,4	10,4	10,0	10,4	8,4
Thermal resistance	°C/W	0,58	0,58	0,58	0,58	0,58

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 610x610x20mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

		SKA DDR 245.60.70.19	SKA DDR 245.60.70.50	SKA DDR 245.60.70.51	SKA DDR 245.60.70.52	SKA DDR 245.60.70.53
Stall torque	Nm	70	70	70	70	70
Peak torque	Nm	241	241	241	241	241
Stall current	Arms	17,5	12,5	7,45	4,46	2,23
Peak current	Arms	73,9	51,5	30,9	18,2	9,1
Maximum speed @230 Vac 3phase	rpm	750	500	300	180	90
Maximum speed @400 Vac 3phase	rpm	-	800	500	300	150
Torque constant ± 5%	Nm/Arms	3,3	4,7	7,9	13,2	26,4
Voltage constant ± 5%	Vrms/krpm	240	340	570	950	1900
Phase/phase resistance ± 5%	Ohm	0,31	0,76	2,07	5,0	23
Phase/phase inductance	mH	4,4	6,5	21	65	260
Electrical time constant	msec	14,0	14,0	10,0	13,00	11,0
Thermal resistance	°C/W	0,49	0,49	0,49	0,49	0,49

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 610x610x20mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

SKA DDR 245 RATINGS AND SPECIFICATIONS

TIME RATING	Continuous	AMBIENT TEMPERATURE	0 to 40 °C
INSULATION CLASS	F	AMBIENT HUMIDITY	20 to 80% RH (non condensing)
POLES	28	THERMAL PROTECTION	PT 1000
INSULATION SYSTEM UL / CSA	cURus , DV155J File nr.:E216686	CE certified	

SKA DDR 245.90.93.51 SKA DDR 245.90.93.52 SKA DDR 245.90.93.53

Stall torque	Nm	93	93	93
Peak torque	Nm	350	350	350
Stall current	Arms	9,89	5,92	2,96
Peak current	Arms	44,7	26,5	13,2
Maximum speed @230 Vac 3phase	rpm	300	180	90
Maximum speed @400 Vac 3phase	rpm	500	300	150
Torque constant ± 5%	Nm/Arms	7,9	13,2	26,4
Voltage constant ± 5%	Vrms/krpm	570	950	1900
Phase/phase resistance ± 5%	Ohm	1,14	4,32	14,3
Phase/phase inductance	mH	18	40	142
Electrical time constant	msec	15,8	15,8	15,8
Thermal resistance	°C/W	0,42	0,42	0,42

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 610x610x20mm heat sink flange coupling and with top flange not sealed.
Derating must be considered in some Power Pack configuration.

SKA DDR 245.120.115.51 SKA DDR 245.120.115.52 SKA DDR 245.120.115.53

Stall torque	Nm	115	115	115
Peak torque	Nm	458	458	458
Stall current	Arms	12,2	7,32	3,66
Peak current	Arms	58,6	34,6	17,3
Maximum speed @230 Vac 3phase	rpm	300	180	90
Maximum speed @400 Vac 3phase	rpm	500	300	150
Torque constant ± 5%	Nm/Arms	7,9	13,2	26,4
Voltage constant ± 5%	Vrms/krpm	570	950	1900
Phase/phase resistance ± 5%	Ohm	1,12	2,8	9,95
Phase/phase inductance	mH	9,8	27,5	135
Electrical time constant	msec	12	12	13,6
Thermal resistance	°C/W	0,38	0,38	0,38

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.


Output continuous rating with 610x610x20mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

SEE IT BEFORE IT HAPPENS




SKA DDR 245 DIMENSIONS AND CONFIGURATIONS

SKA DDR 245 FRAMELESS reference drawing 202

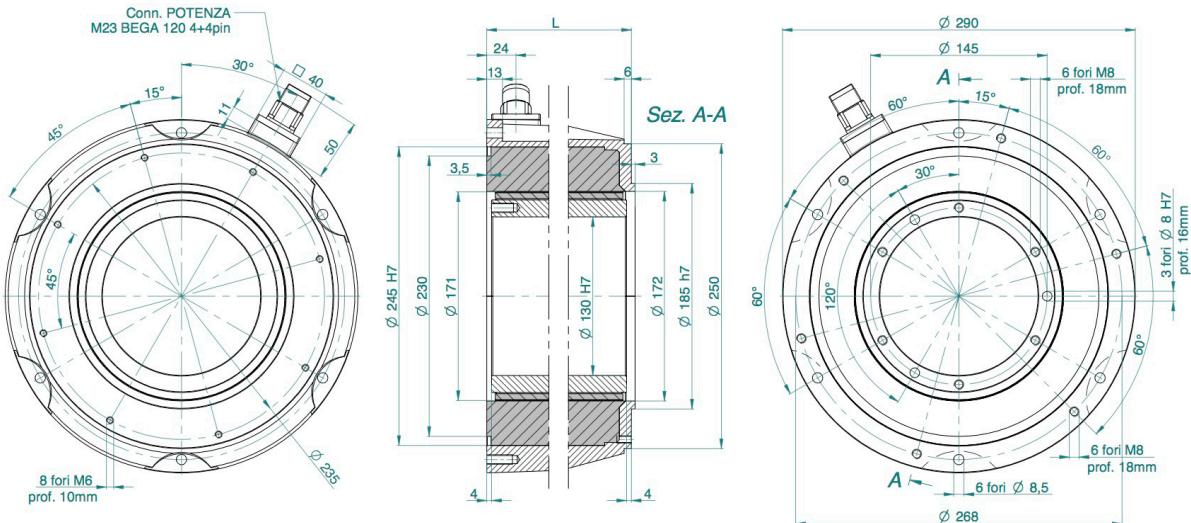


MOTOR TYPE	L (mm)
SKA DDR 245.30	70
SKA DDR 245.60	100
SKA DDR 245.90	130
SKA DDR 245.120	160

SKA DDR 245 60 FRAMELESS AND HALL SENSORS reference drawing 203

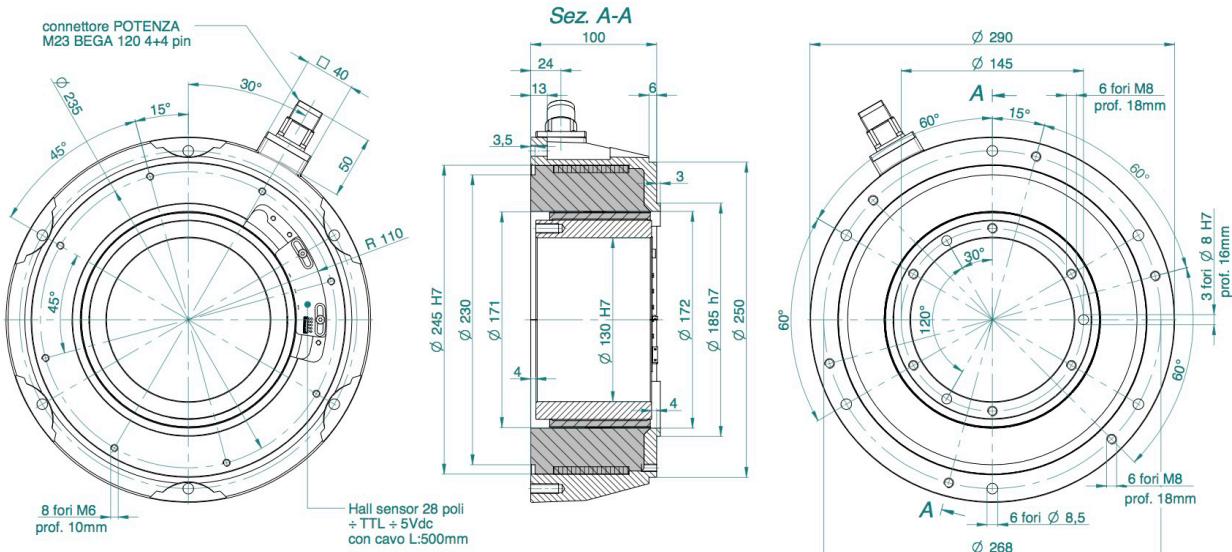


SKA DDR 245 DIMENSIONS AND CONFIGURATIONS

SKA DDR 245 POWER PACK HOLLOW SHAFT reference drawing 204

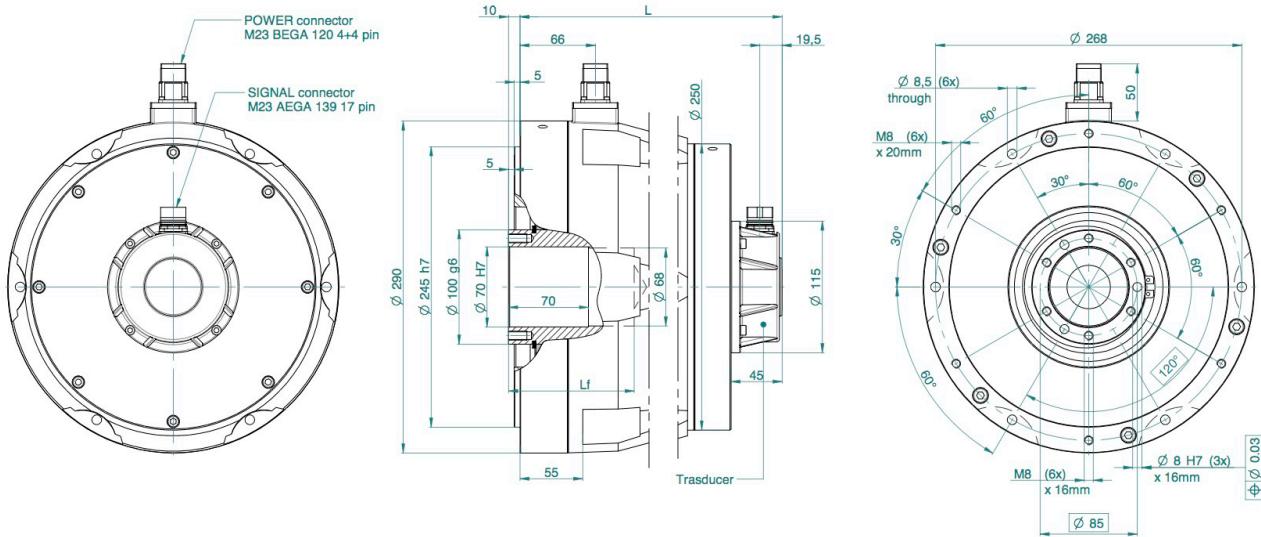


MOTOR TYPE	L (mm)	Lf (mm)
SKA DDR 245.30	189	80
SKA DDR 245.60	219	110
SKA DDR 245.90	249	140
SKA DDR 245.120	279	170

SKA DDR 245 60 POWER PACK MALE SHAFT reference drawing 205

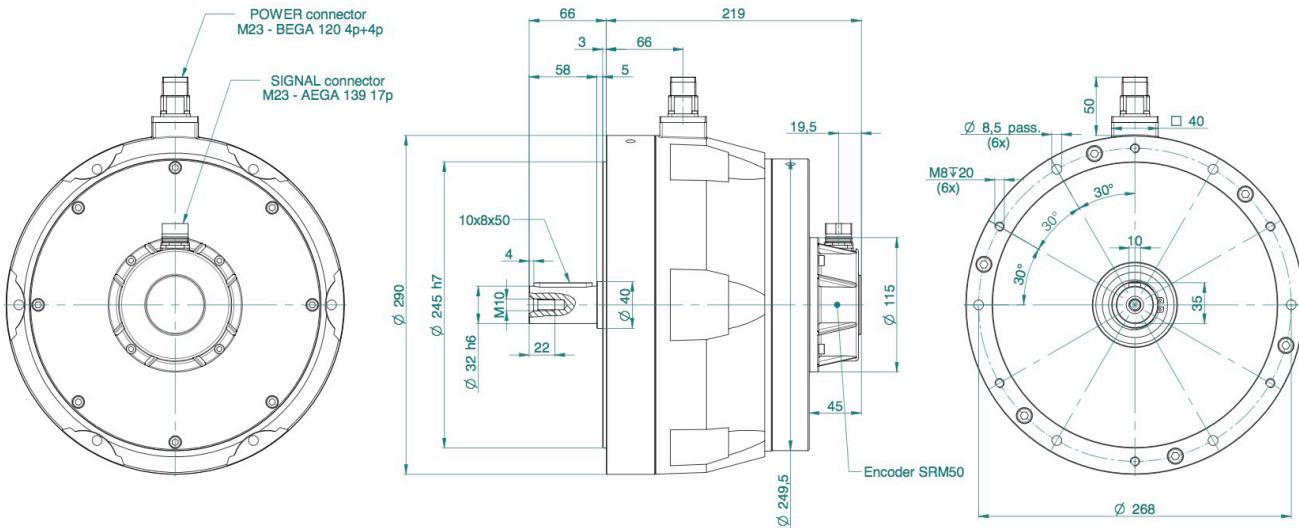


SKA DDR 245 DIMENSIONS AND CONFIGURATIONS

SKA DDR 245 30 HOLLOW THROUGH SHAFT AND BRAKE reference drawing 206

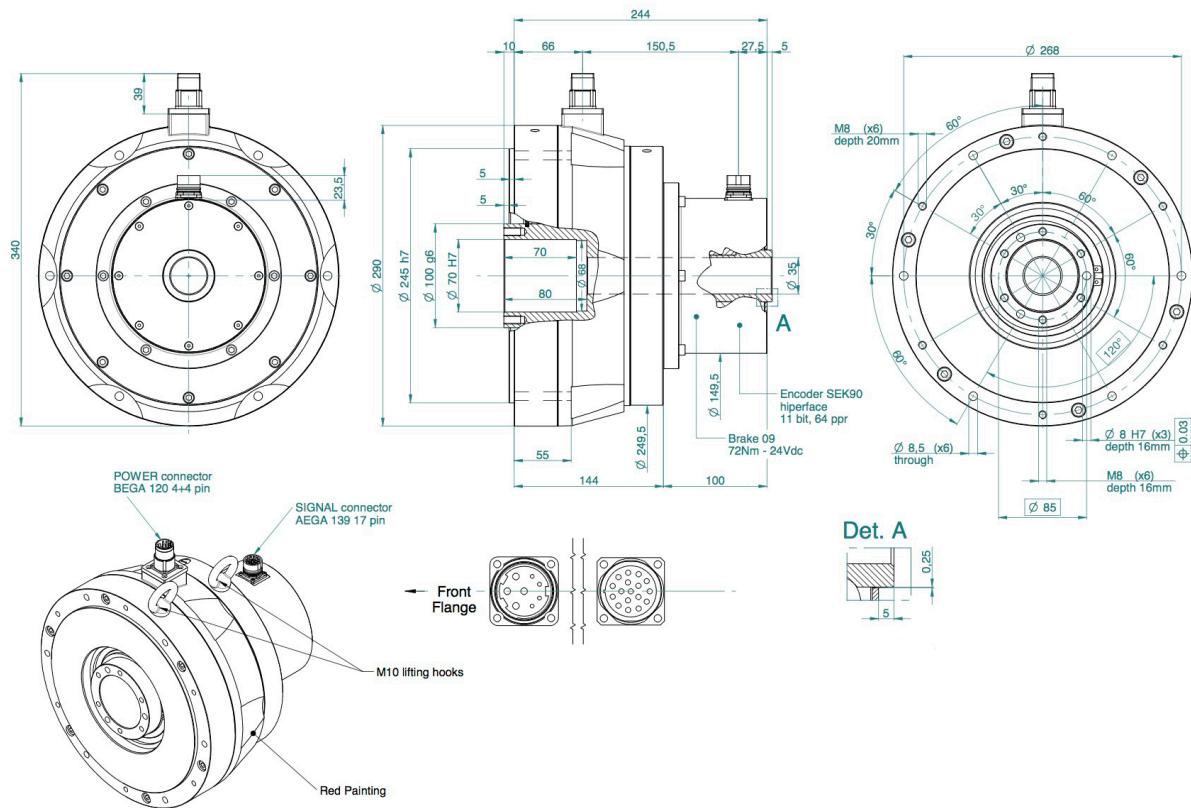


SKA DDR 245 120 POWER PACK HOLLOW SHAFT AND BRAKE reference drawing 207

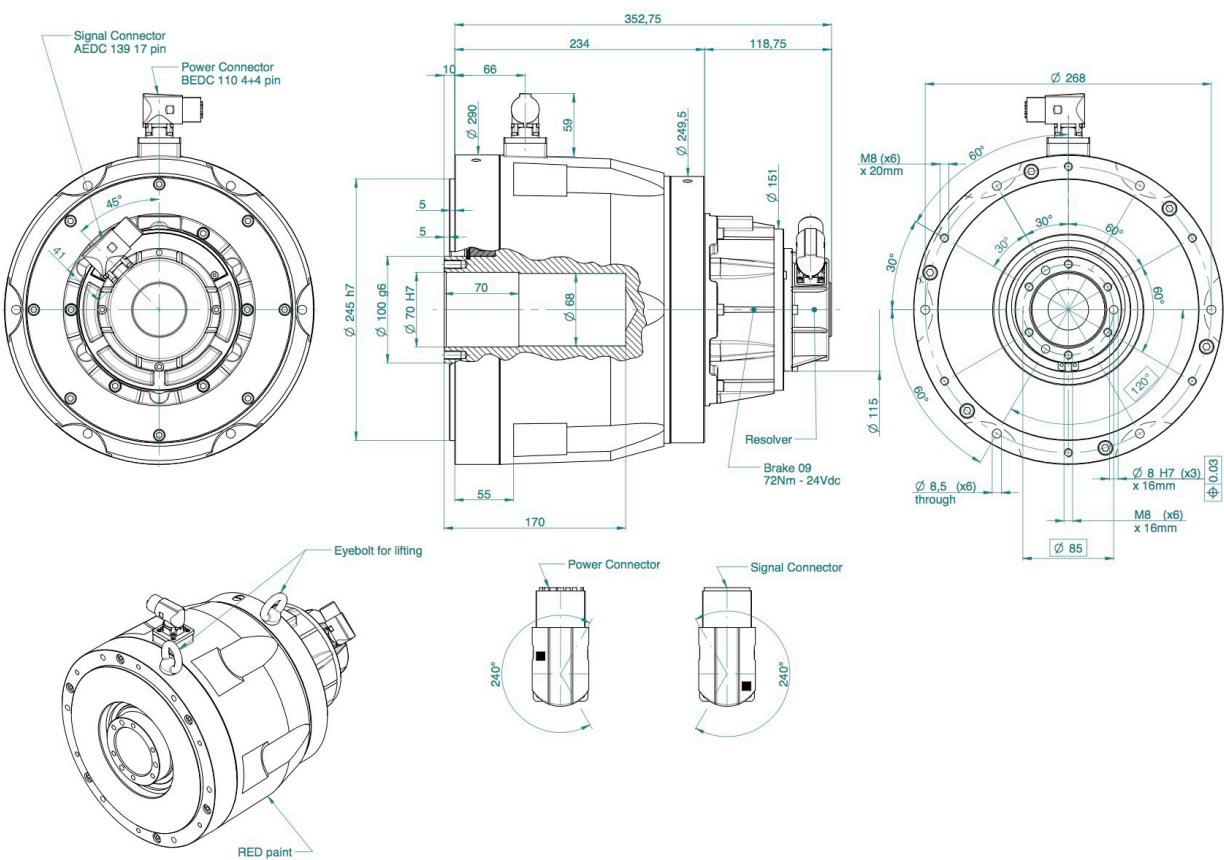


SKA DDR 245 TORQUE AND SPEED CHARTS

SKA DDR 245.120.51 400 Vac

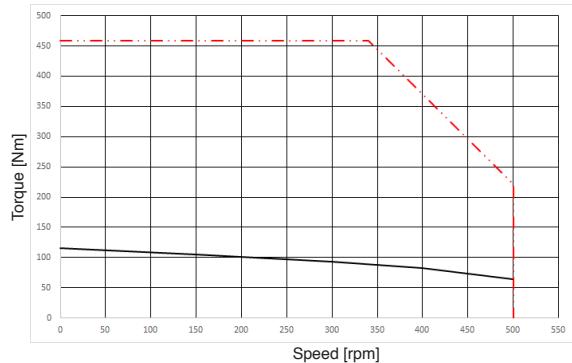

SKA DDR 245.120.52 400 Vac

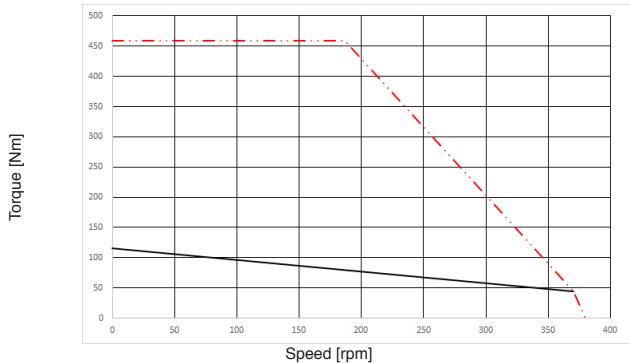

— CONTINUOUS DUTY @ RATED VOLTAGE

··· INTERMITTENT DUTY @ RATED VOLTAGE

SKA DDR 335 RATINGS AND SPECIFICATIONS

TIME RATING	Continuous	AMBIENT TEMPERATURE	0 to 40 °C
INSULATION CLASS	F	AMBIENT HUMIDITY	20 to 80% RH (non condensing)
POLES	42	THERMAL PROTECTION	PT 1000
INSULATION SYSTEM UL / CSA	cURus , DV155J File nr.:E216686	CE certified	

SKA DDR 335.30.100.51 SKA DDR 335.30.100.52 SKA DDR 335.30.100.53 SKA DDR 335.30.100.54

Stall torque	Nm	100	100	100	100
Peak torque	Nm	290	290	290	290
Stall current	Arms	10,6	6,36	3,18	1,92
Peak current	Arms	36,7	22,3	11,0	6,61
Maximum speed @230 Vac 3phase	rpm	300	180	90	50
Maximum speed @400 Vac 3phase	rpm	500	300	150	90
Torque constant ± 5%	Nm/Arms	7,9	13,2	26,4	43,8
Voltage constant ± 5%	Vrms/krpm	570	950	1900	3150
Phase/phase resistance ± 5%	Ohm	1,24	5,7	17,0	38,7
Phase/phase inductance	mH	12	34	130	376
Electrical time constant	msec	9,72	9,72	9,72	9,72
Thermal resistance	°C/W	0,26	0,26	0,26	0,26

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding coil temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 840x840x30mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

SKA DDR 335.60.164.51 SKA DDR 335.60.164.52 SKA DDR 335.60.164.53 SKA DDR 335.60.164.54

Stall torque	Nm	164	164	164	164
Peak torque	Nm	550	550	550	550
Stall current	Arms	17,4	10,4	5,22	3,15
Peak current	Arms	69,5	41,8	20,8	12,5
Maximum speed @230 Vac 3phase	rpm	300	180	90	50
Maximum speed @400 Vac 3phase	rpm	500	300	150	90
Torque constant ± 5%	Nm/Arms	7,9	13,2	26,4	43,8
Voltage constant ± 5%	Vrms/krpm	570	950	1900	3150
Phase/phase resistance ± 5%	Ohm	0,52	1,9	5,80	16,4
Phase/phase inductance	mH	6,8	17	75	210
Electrical time constant	msec	13,0	13,0	13,0	12,8
Thermal resistance	°C/W	0,30	0,30	0,30	0,30

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding coil temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 840x840x30mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

SKA DDR 335 RATINGS AND SPECIFICATIONS

TIME RATING	Continuous	AMBIENT TEMPERATURE	0 to 40 °C
INSULATION CLASS	F	AMBIENT HUMIDITY	20 to 80% RH (non condensing)
POLES	42	THERMAL PROTECTION	PT 1000
INSULATION SYSTEM UL / CSA	cURus , DV155J File nr.:E216686	CE certified	

	SKA DDR 335.90.220.51	SKA DDR 335.90.220.52	SKA DDR 335.90.220.53	SKA DDR 335.90.220.54	SKA DDR 335.90.220.55
--	--	--	--	--	--

Stall torque	Nm	220	220	220	220
Peak torque	Nm	800	800	800	624
Stall current	Arms	23,4	14,0	7,00	4,22
Peak current	Arms	101	60,6	30,3	18,3
Maximum speed @230 Vac 3phase	rpm	300	180	90	50
Maximum speed @400 Vac 3phase	rpm	-	300	150	90
Torque constant ± 5%	Nm/Arms	7,9	13,2	26,4	43,8
Voltage constant ± 5%	Vrms/krpm	570	950	1900	3150
Phase/phase resistance ± 5%	Ohm	0,32	0,92	5	11,3
Phase/phase inductance	mH	4,4	12,9	44	150
Electrical time constant	msec	13,8	14,0	14,3	13,2
Thermal resistance	°C/W	0,26	0,26	0,26	0,26

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 840x840x30mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

	SKA DDR 335.120.270.51	SKA DDR 335.120.270.52	SKA DDR 335.120.270.53	SKA DDR 335.120.270.54	SKA DDR 335.120.270.55
--	---	---	---	---	---

Stall torque	Nm	270	270	270	270
Peak torque	Nm	1043	1043	1043	1043
Stall current	Arms	28,7	17,2	8,59	5,18
Peak current	Arms	132	79,0	39,6	23,8
Maximum speed @230 Vac 3phase	rpm	300	180	90	50
Maximum speed @400 Vac 3phase	rpm	-	300	150	90
Torque constant ± 5%	Nm/Arms	7,9	13,2	26,4	43,8
Voltage constant ± 5%	Vrms/krpm	570	950	1900	3150
Phase/phase resistance ± 5%	Ohm	0,24	0,67	2,72	7,43
Phase/phase inductance	mH	3,5	10,4	42,1	116
Electrical time constant	msec	15,6	15,5	15,5	15,6
Thermal resistance	°C/W	0,25	0,25	0,25	0,25

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 840x840x30mm heat sink flange coupling and with top flange not sealed.
Derating must be considered in some Power Pack configuration.

SEE IT BEFORE IT HAPPENS



SKA DDR 335 RATINGS AND SPECIFICATIONS

TIME RATING	Continuous	AMBIENT TEMPERATURE	0 to 40 °C
INSULATION CLASS	F	AMBIENT HUMIDITY	20 to 80% RH (non condensing)
POLES	42	THERMAL PROTECTION	PT 1000
INSULATION SYSTEM UL / CSA	cURus , DV155J File nr.:E216686	CE certified	


		SKA DDR 335.150.320.51	SKA DDR 335.150.320.52	SKA DDR 335.150.320.53	SKA DDR 335.150.320.54	SKA DDR 335.150.320.55
Stall torque	Nm	320	320	320	320	320
Peak torque	Nm	1290	1290	1290	1290	1097
Stall current	Arms	34,0	20,4	10,2	6,14	3,39
Peak current	Arms	163	97,7	48,9	29,4	13,4
Maximum speed @230 Vac 3phase	rpm	300	180	90	50	-
Maximum speed @400 Vac 3phase	rpm	-	300	150	90	50
Torque constant ± 5%	Nm/Arms	7,9	13,2	26,4	43,8	81,9
Voltage constant ± 5%	Vrms/krpm	570	950	1900	3150	5700
Phase/phase resistance ± 5%	Ohm	0,19	0,7	3,1	6,8	19,2
Phase/phase inductance	mH	3,0	8	26	78	311
Electrical time constant	msec	15,8	16,2	16,2	16,2	16,2
Thermal resistance	°C/W	0,144	0,144	0,144	0,144	0,144

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 840x840x30mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.


SKA DDR 335 DIMENSIONS AND CONFIGURATIONS

SKA DDR 335 FRAMELESS reference drawing 302

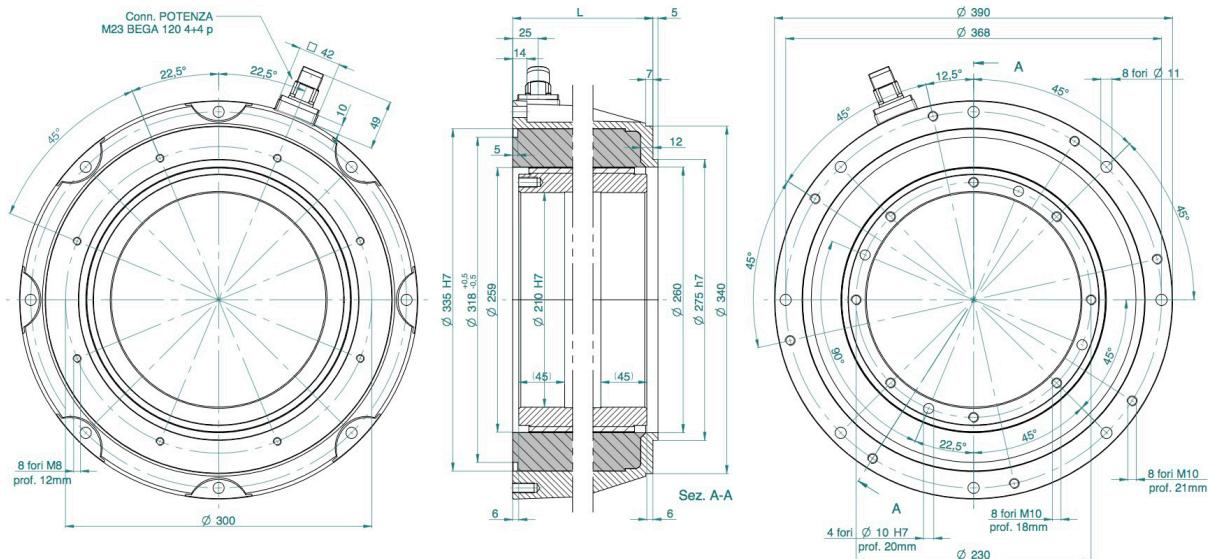

MOTOR TYPE	L (mm)
SKA DDR 335.30	82
SKA DDR 335.60	112
SKA DDR 335.90	142
SKA DDR 335.120	172
SKA DDR 335.150	202


SKA DDR 335 FRAMELESS AND HALL SENSORS reference drawing 303

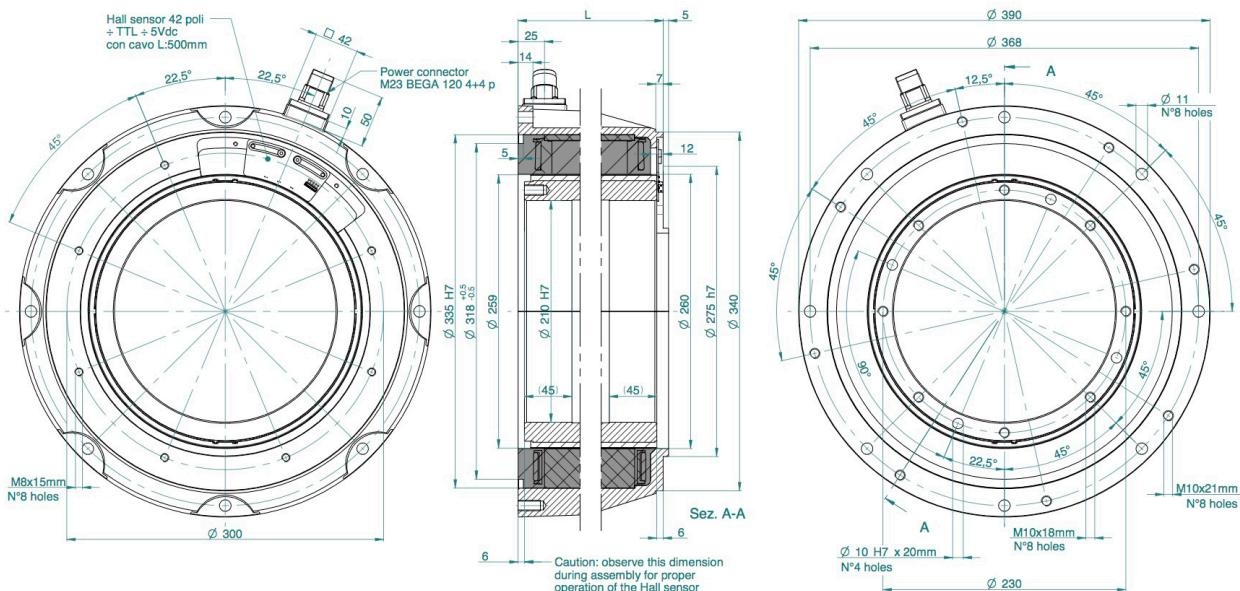


MOTOR TYPE	L (mm)
SKA DDR 335.30	82
SKA DDR 335.60	112
SKA DDR 335.90	142
SKA DDR 335.120	172
SKA DDR 335.150	202

SKA DDR 335 DIMENSIONS AND CONFIGURATIONS

SKA DDR 335 30 POWER PACK HOLLOW THOUGH SHAFT reference drawing 304

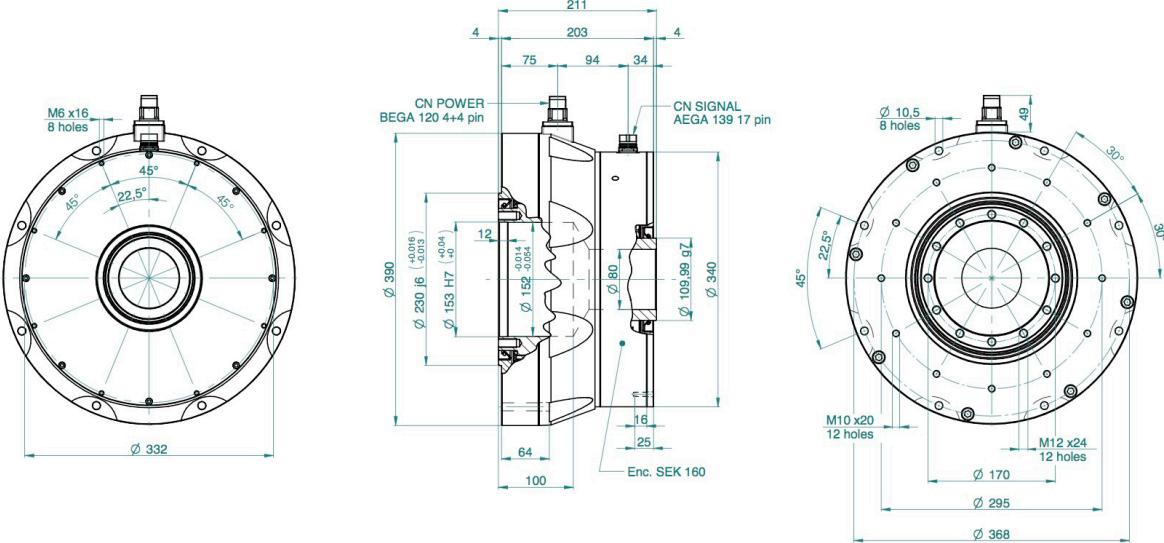


SKA DDR 335 90 POWER PACK HOLLOW SHAFT reference drawing 305

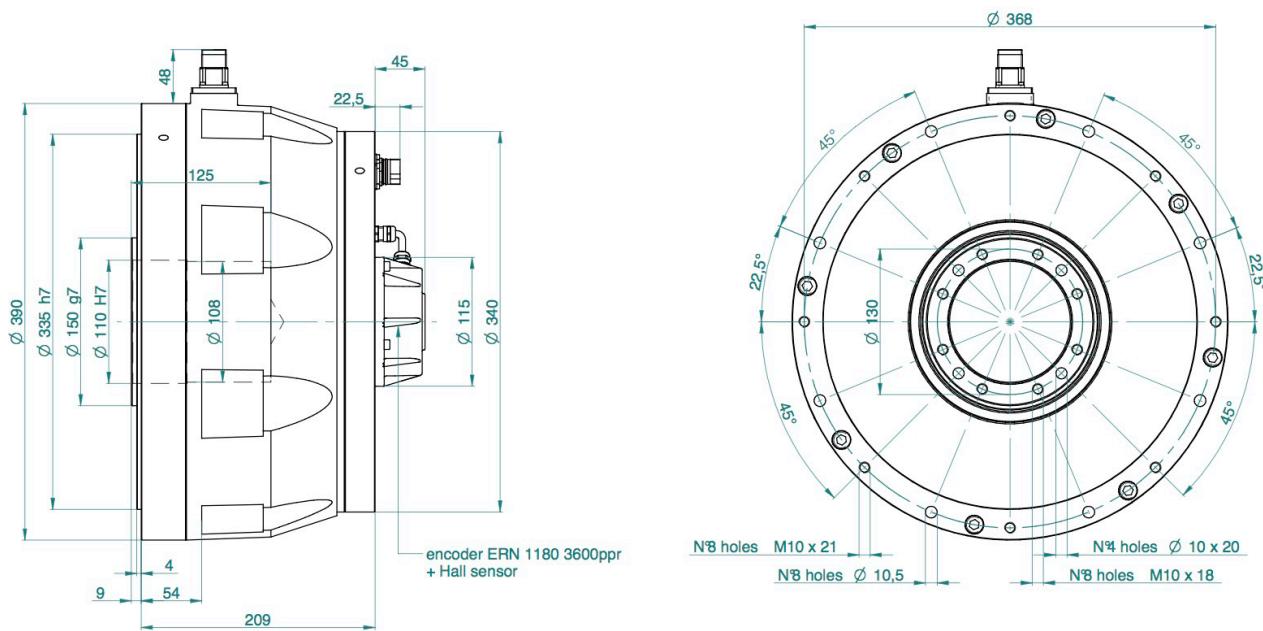


SKA DDR 335 DIMENSIONS AND CONFIGURATIONS

SKA DDR 335 150 POWER PACK MALE SHAFT reference drawing 306

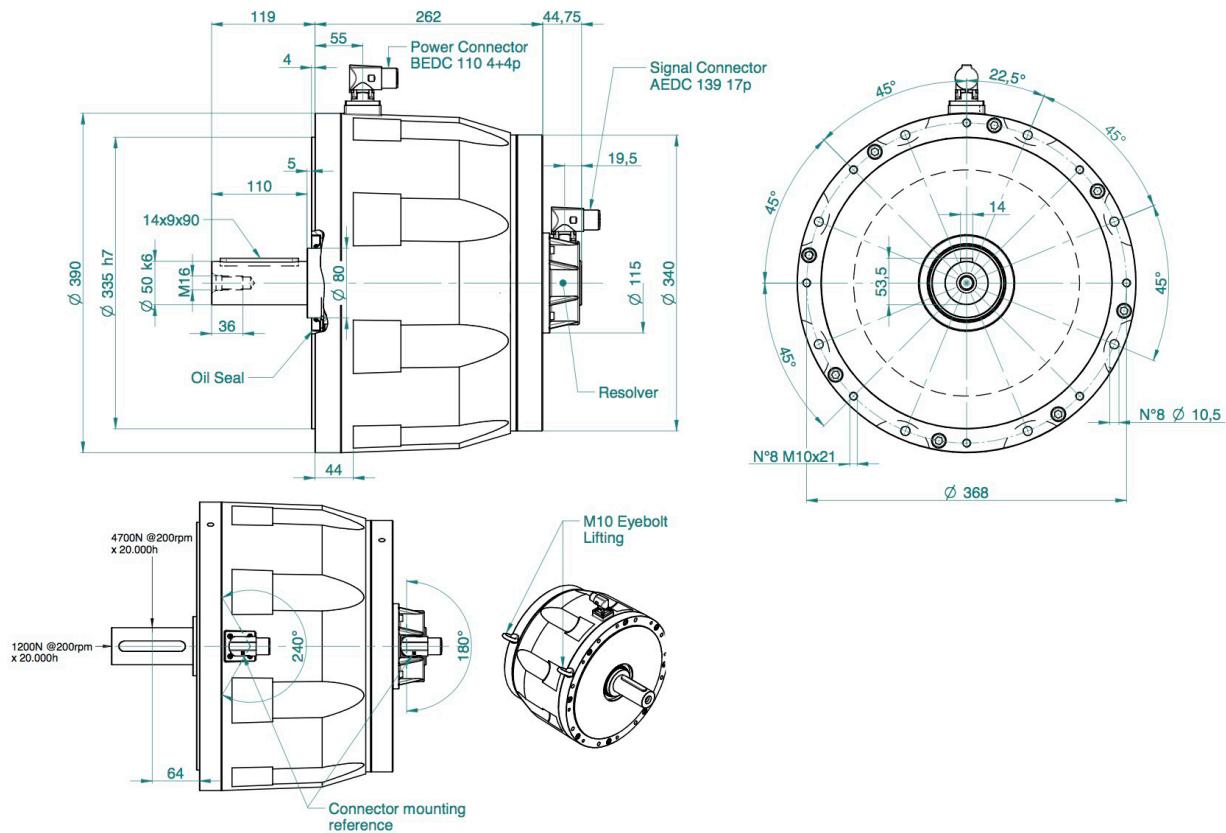

SKA DDR 335 30 POWER PACK HOLLOW SHAFT AND BRAKE reference drawing 307

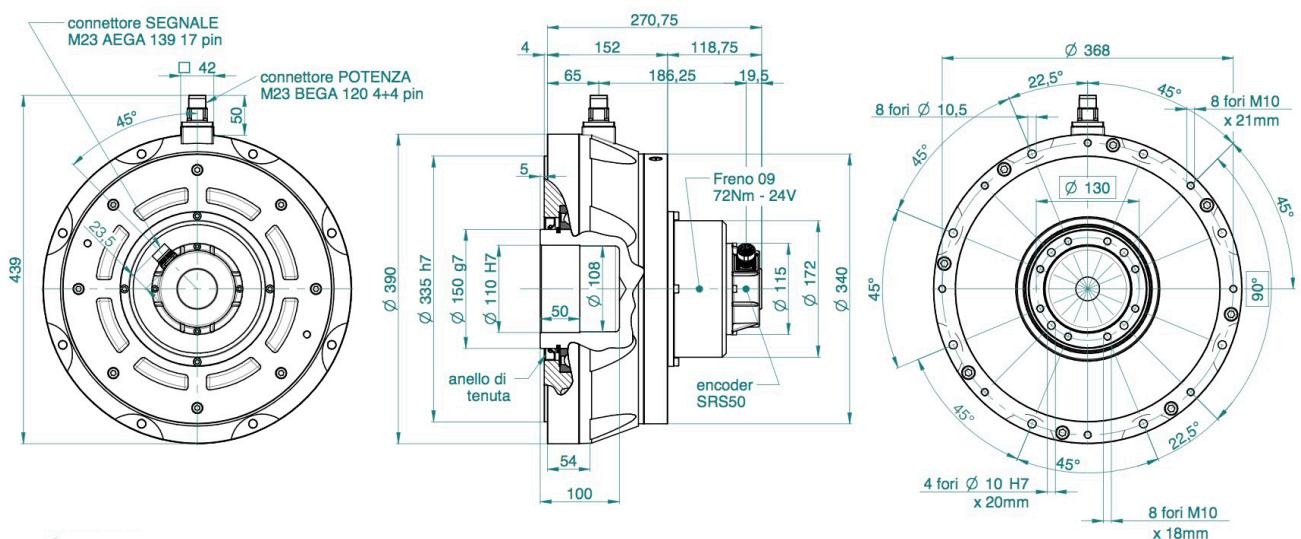


SEE IT BEFORE IT HAPPENS

**MOTOR
POWER**
COMPANY


SKA DDR 335 DIMENSIONS AND CONFIGURATIONS

SKA DDR 335 60 POWER PACK HOLLOW SHAFT AND BRAKE reference drawing 308

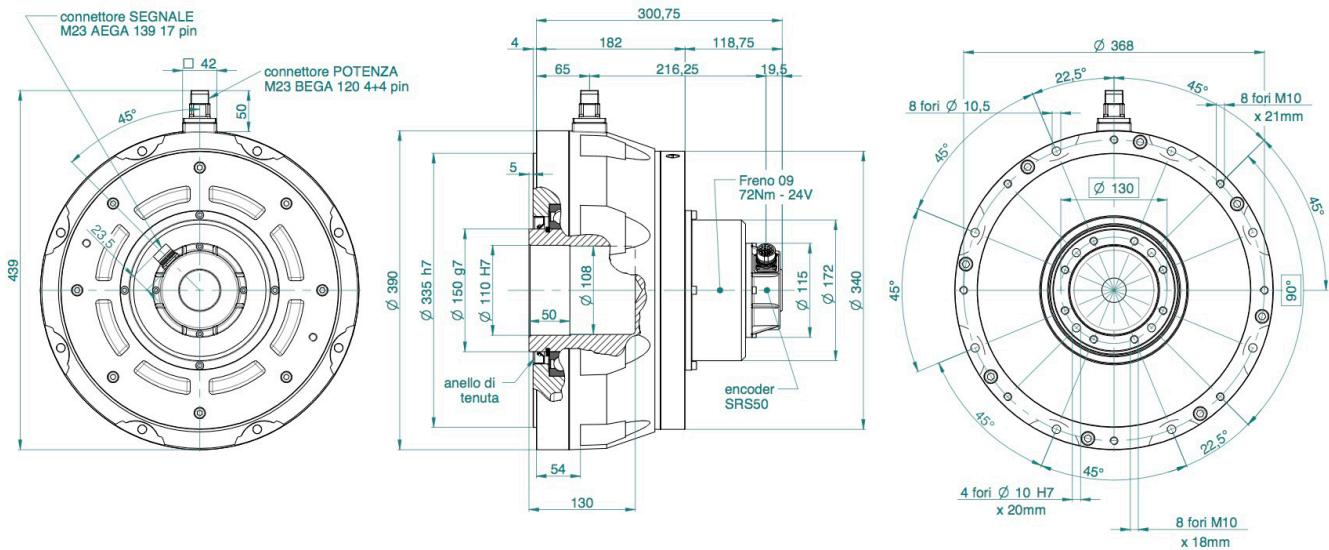


SKA DDR 335 TORQUE AND SPEED CHARTS


SKA DDR 335.30.52 400 Vac

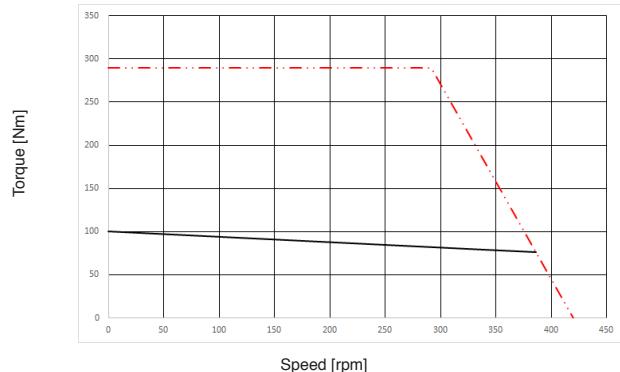

SKA DDR 335.30.53 400 Vac

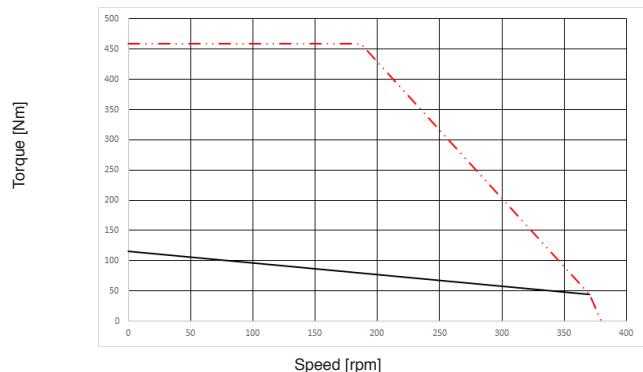

SKA DDR 335.150.52 400 Vac

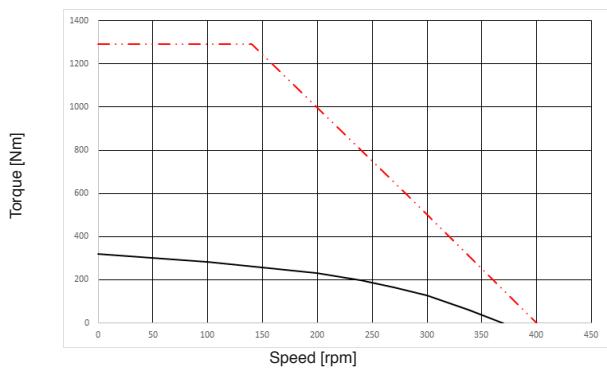

— CONTINUOUS DUTY @ RATED VOLTAGE

··· INTERMITTENT DUTY @ RATED VOLTAGE

SKA DDR 430 RATINGS AND SPECIFICATIONS

TIME RATING	Continuous	AMBIENT TEMPERATURE	0 to 40 °C
INSULATION CLASS	F	AMBIENT HUMIDITY	20 to 80% RH (non condensing)
POLES	56	THERMAL PROTECTION	PT 1000
INSULATION SYSTEM UL / CSA	cURus , DV155J File nr.:E216686	CE certified	

		SKA DDR 430.30.210.52	SKA DDR 430.30.210.53	SKA DDR 430.30.210.54	SKA DDR 430.30.210.55	SKA DDR 430.30.210.56
Stall torque	Nm	210	210	210	210	210
Peak torque	Nm	458	458	458	436	458
Stall current	Arms	13,3	6,68	4,01	2,23	9,07
Peak current	Arms	40,4	20,2	12,1	6,37	27
Maximum speed @230 Vac 3phase	rpm	180	90	50	-	100
Maximum speed @400 Vac 3phase	rpm	300	150	90	50	150
Torque constant ± 5%	Nm/Arms	11,3	22,7	37,9	68,4	23,16
Voltage constant ± 5%	Vrms/krpm	950	1900	3150	5700	1400
Phase/phase resistance ± 5%	Ohm	1,11	4,47	12,5	40,3	3,25
Phase/phase inductance	mH	16,0	66,0	183	593	22,8
Electrical time constant	msec	14,4	14,8	14,6	14,7	7,0
Thermal resistance	°C/W	0,23	0,23	0,23	0,23	0,23

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 1000x1000x30mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

		SKA DDR 430.60.340.52	SKA DDR 430.60.340.53	SKA DDR 430.60.340.54	SKA DDR 430.60.340.55	SKA DDR 430.60.340.56
Stall torque	Nm	340	340	340	340	340
Peak torque	Nm	868	868	868	868	868
Stall current	Arms	21,8	10,9	6,58	3,64	14,68
Peak current	Arms	76,8	38,2	22,9	12,7	37,5
Maximum speed @230 Vac 3phase	rpm	180	90	50	-	100
Maximum speed @400 Vac 3phase	rpm	300	150	90	50	150
Torque constant ± 5%	Nm/Arms	11,3	22,7	37,9	68,4	23,16
Voltage constant ± 5%	Vrms/krpm	950	1900	3150	5700	1400
Phase/phase resistance ± 5%	Ohm	0,7	2,65	5,22	16,9	1,47
Phase/phase inductance	mH	10	32	102	330	14,50
Electrical time constant	msec	12	12	19,5	19,5	9,9
Thermal resistance	°C/W	0,21	0,21	0,21	0,21	0,21

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 1000x1000x30mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

SKA DDR 430 RATINGS AND SPECIFICATIONS

TIME RATING	Continuous	AMBIENT TEMPERATURE	0 to 40 °C
INSULATION CLASS	F	AMBIENT HUMIDITY	20 to 80% RH (non condensing)
POLES	56	THERMAL PROTECTION	PT 1000
INSULATION SYSTEM UL / CSA	cURus , DV155J File nr.:E216686	CE certified	

	SKA DDR 430.90.450.53	SKA DDR 430.90.450.54	SKA DDR 430.90.450.55	SKA DDR 430.90.450.56
--	----------------------------------	----------------------------------	----------------------------------	----------------------------------

Stall torque	Nm	450	450	450
Peak torque	Nm	1254	1254	1254
Stall current	Arms	14,3	8,63	4,78
Peak current	Arms	55,2	33,1	18,3
Maximum speed @230 Vac 3phase	rpm	90	50	-
Maximum speed @400 Vac 3phase	rpm	150	90	50
Torque constant ± 5%	Nm/Arms	22,7	37,9	68,4
Voltage constant ± 5%	Vrms/krpm	1900	3150	5700
Phase/phase resistance ± 5%	Ohm	1,19	4,14	16,4
Phase/phase inductance	mH	26,2	73,0	200
Electrical time constant	msec	22,0	22,1	22,0
Thermal resistance	°C/W	0,136	0,136	0,136

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 1000x1000x30mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

	SKA DDR 430.120.560.53	SKA DDR 430.120.560.54	SKA DDR 430.120.560.55
--	-----------------------------------	-----------------------------------	-----------------------------------

Stall torque	Nm	560	560	560
Peak torque	Nm	1649	1649	1649
Stall current	Arms	17,82	10,7	5,94
Peak current	Arms	72,6	43,5	24,1
Maximum speed @230 Vac 3phase	rpm	90	50	-
Maximum speed @400 Vac 3phase	rpm	150	90	50
Torque constant ± 5%	Nm/Arms	22,7	37,9	68,4
Voltage constant ± 5%	Vrms/krpm	1900	3150	5700
Phase/phase resistance ± 5%	Ohm	1,37	2,42	7,80
Phase/phase inductance	mH	26	57	183
Electrical time constant	msec	19	23,6	23,5
Thermal resistance	°C/W	0,17	0,17	0,17

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.

Output continuous rating with 1000x1000x30mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

SEE IT BEFORE IT HAPPENS



SKA DDR 430 RATINGS AND SPECIFICATIONS

TIME RATING	Continuous	AMBIENT TEMPERATURE	0 to 40 °C
INSULATION CLASS	F	AMBIENT HUMIDITY	20 to 80% RH (non condensing)
POLES	42	THERMAL PROTECTION	PT 1000
INSULATION SYSTEM UL / CSA	cURus , DV155J File nr.:E216686	CE certified	

SKA DDR 430.150.660.54	SKA DDR 430.150.660.55
---	---

Stall torque	Nm	660	660
Peak torque	Nm	2025	2025
Stall current	Arms	12,7	7,00
Peak current	Arms	53,4	29,6
Maximum speed @230 Vac 3phase	rpm	50	-
Maximum speed @400 Vac 3phase	rpm	90	50
Torque constant ± 5%	Nm/Arms	37,9	68,4
Voltage constant ± 5%	Vrms/krpm	3150	5700
Phase/phase resistance ± 5%	Ohm	2,03	6,21
Phase/phase inductance	mH	47,3	152
Electrical time constant	msec	23,3	24,5
Thermal resistance	°C/W	0,15	0,15

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.winding

Output continuous rating with 1000x1000x30mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.

SKA DDR 430.180.760.54	SKA DDR 430.180.760.55
---	---



Stall torque	Nm	760	760
Peak torque	Nm	2400	2400
Stall current	Arms	14,6	8,06
Peak current	Arms	64	35,1
Maximum speed @230 Vac 3phase	rpm	50	-
Maximum speed @400 Vac 3phase	rpm	90	50
Torque constant ± 5%	Nm/Arms	37,6	68,4
Voltage constant ± 5%	Vrms/krpm	3150	5700
Phase/phase resistance ± 5%	Ohm	2,5	8,5
Phase/phase inductance	mH	32	105
Electrical time constant	msec	12,8	12,5
Thermal resistance	°C/W	0,10	0,08

Values and torque/speed specifications here detailed are obtained with the SKA DDR coupled to FLEXI PRO drive, with a winding temperature of 100°C.
All others data are with a coil temperature of 25°C.winding

Output continuous rating with 1000x1000x30mm heat sink flange coupling and with front flange not sealed.
Derating must be considered in some Power Pack configuration.


SKA DDR 430 DIMENSIONS AND CONFIGURATIONS

SKA DDR 430 BLIND HOLLOW SHAFT reference drawing 402

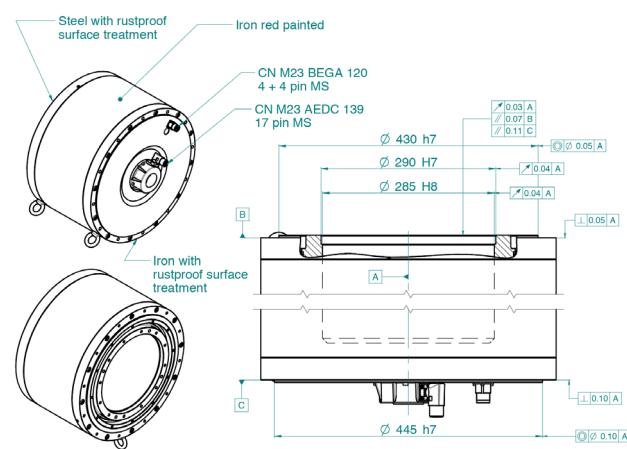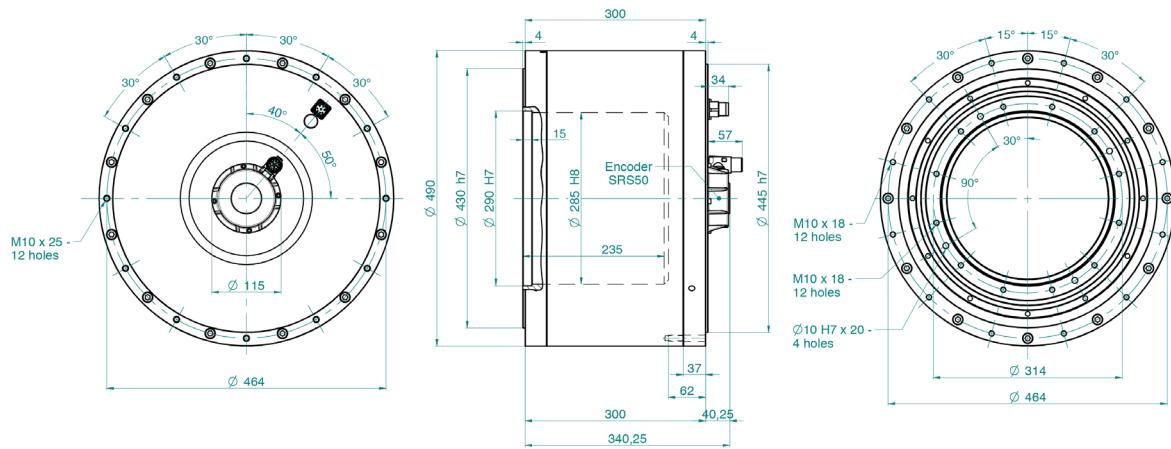


SKA DDR 430 TORQUE AND SPEED CHARTS


SKA DDR 430.90.54 400 Vac

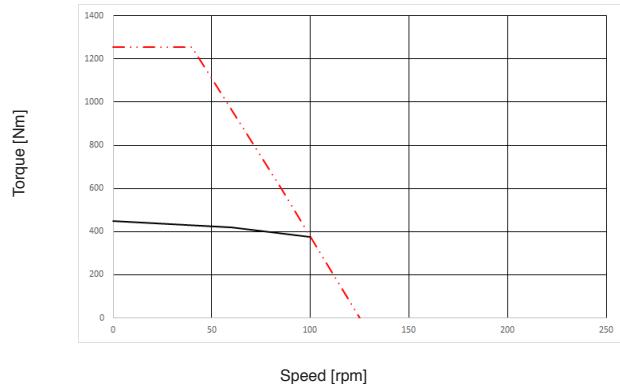

SKA DDR 430.180.54 400 Vac

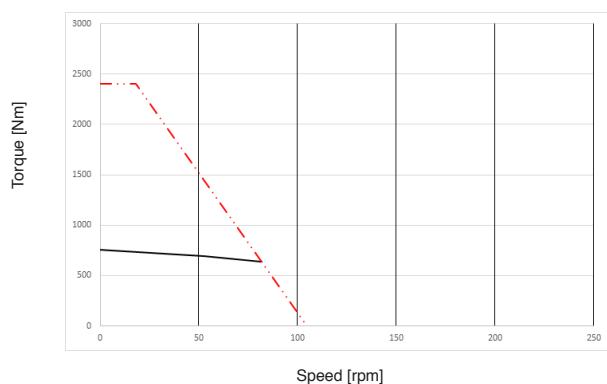

SKA DDR 430.180.55 400 Vac

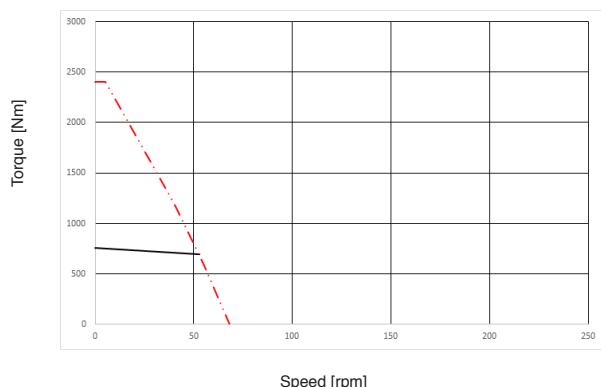

— CONTINUOUS DUTY @ RATED VOLTAGE

— DASHED RED LINE — INTERMITTENT DUTY @ RATED VOLTAGE

BRAKE FEATURES

SKA DDR 090			
Static Torque @20°C	Nm	2	4,5
Moment of Inertia	Kg cm ²	0,050	0,220
Rated Current	A	0,46	0,5
Input Power	W	11	12
Engaging Time	ms	6	7
Release Time	ms	25	35
Operating Voltage	24 Vdc +6% - 10% Stabilized		

SKA DDR 148			
Static Torque @20°C	Nm	18	36
Moment of Inertia	Kg cm ²	1,9	6,21
Rated Current	A	1	1,08
Input Power	W	24	26
Engaging Time	ms	10	22
Release Time	ms	50	90
Operating Voltage	24 Vdc +6% - 10% Stabilized		

SKA DDR 245 - 335 - 430			
Static Torque @20°C	Nm	72	
Moment of Inertia	Kg cm ²	15,3	
Rated Current	A	1,66	
Input Power	W	40	
Engaging Time	ms	7	
Release Time	ms	140	
Operating Voltage	24 Vdc +6% - 10% Stabilized		

THERMAL PROTECTION FEATURES

PT 1000

Thermal protection features

Type	PT 1000-R8/2-2F
Sensor	Sensor RTD (Platinum Resistance Temperature Detectors) according to DIN EN 60751
Temperature range	from -40 °C to 250 °C
Accuracy	$\Delta t = \pm (0,3 + 0,04t) ^\circ\text{C}$

°C	Resistance (Ω)
-40	843
-30	882
-20	922
-10	961
0	1000
10	1039
20	1078
30	1117
40	1155
50	1194
60	1232
70	1271
80	1309
90	1347
100	1385
110	1423
120	1461
130	1498
140	1536
150	1573
160	1611

WIRING MOTOR CONNECTIONS

CONNECTORS WITH 29 CONNECTION and PT1000 on power

POWER CONNECTOR

FEEDBACK CONNECTOR

RESOLVER

HIPERFACE ABSOLUTE ENCODER

PIN	FUNCTION	PIN	FEEDBACK FUNCTION	PIN	FEEDBACK FUNCTION
1	Phase U	1	-	1	-
2	PE	2	-	2	-
3	Phase W	3	-	3	0 Vdc
4	Phase V	4	-	4	7-12 Vdc
A	Brake 24V (#)	5	/Sin	5	/Sin
B	Brake 0V (#)	6	Sin +	6	Sin
C	PT 1000 (+)	7	/Ref	7	/DATA
D	PT 1000 (-)	8	Ref	8	DATA
(##) Optional		9	-	9	-
		10	Shield	10	Shield
		11	/Cos	11	/Cos
		12	Cos	12	Cos
		13	-	13	-
		14	-	14	-
		15	-	15	-
		16	-	16	-
		17	-	17	-

CONNECTORS WITH 29 CONNECTION and PT1000 on signal

POWER CONNECTOR

FEEDBACK CONNECTOR

RESOLVER

HIPERFACE ABSOLUTE ENCODER

PIN	FUNCTION	PIN	FEEDBACK FUNCTION	PIN	FEEDBACK FUNCTION
1	Phase U	1	-	1	-
2	PE	2	-	2	-
3	Phase W	3	-	3	0 Vdc
4	Phase V	4	-	4	7-12 Vdc
A	Brake 24V (#)	5	/Sin	5	/Sin
B	Brake 0V (#)	6	Sin +	6	Sin
C		7	/Ref	7	/DATA
D		8	Ref	8	DATA
(##) Optional		9	-	9	-
		10	Shield	10	Shield
		11	/Cos	11	/Cos
		12	Cos	12	Cos
		13	-	13	-
		14	-	14	-
		15	-	15	-
		16	PT 1000 (+)	16	PT 1000 (+)
		17	PT 1000 (-)	17	PT 1000 (-)

DYNAMIC LAYING CABLES SPECIFICATIONS

SIGNAL CABLES for ALL SERVOMOTORS MODELS

MOTOR SIDE PIN	COLOUR	Signal free wire cable for general purpose	For cable order	
1	Grey/Pink			
2	Red		Lenght (mm)	Order code
3	Blue1		5000	003108011110
4	Red1		10000	003108011112
5	Yellow			
6	Green			
7	Grey			
8	Pink			
9	White/Green			
10	Shield2			
11	Black			
12	Violet			
13	Red/Blue			
14	Brown/Green			
15	Blue			
16	Brown			
17	White			

SEE IT BEFORE IT HAPPENS

**MOTOR
POWER**
COMPANY

DYNAMIC LAYING CABLES SPECIFICATIONS

SIGNAL CABLES for ALL SERVOMOTORS MODELS connection 29

MOTOR SIDE PIN	COLOUR	FUNCTION	DRIVE SIDE PIN	Resolver signal SUMITOMO cable for FLEXI PRO	For cable order
5	Black/Blue	RefSin	19		Lenght (mm) Order code
6	Blue	Sin	6		5000 003108011100
7	Black/Green	Ref-	21		10000 003108011102
8	Green	Ref+	8		
10	Shield	SHIELD	26		
11	Black/Red	RefCos	20		
12	Red	Cos	7		
16	White	PT 1000 (+)	12		
17	Black/White	PT 1000 (-)	25		

Hiperface absolute encoder signal SUMITOMO
cable for FLEXI PRO

MOTOR SIDE PIN	COLOUR	FUNCTION	DRIVE SIDE PIN	Hiperface absolute encoder signal SUMITOMO cable for FLEXI PRO	For cable order
17	White	PT 1000 (+)	25		Lenght (mm) Order code
16	Brown	PT 1000 (-)	12		3000 003108011123
12	Pink	Cos	10		5000 003108020152
11	Grey	Cos-	23		10000 003108020153
10	Shield2	SHIELD	26		
8	Violet	Data+	1		
7	Black	Data-	14		
6	Green	Sin+	9		
5	Yellow	Sin-	22		
4	Red1	7-12V	18		
3	Blue1	GND	24		

SEE IT BEFORE IT HAPPENS

**MOTOR
POWER**
COMPANY

DYNAMIC LAYING CABLES SPECIFICATIONS

POWER CABLES

FUNCTION	PIN/M23	Power free wire cable			
		SKA DDR 090 - 148 - 245		SKA DDR 335 - 430	
Phase U	1	Lenght (mm)	Order code	Lenght (mm)	Order code
Phase V	4	3000	003108007314	3000	003108005080
Phase W	3	5000	003108007302	5000	003108005104
PE	2	10000	003108007316	10000	003108005106
N.C.	A				
N.C.	B				
PT 1000 (+)	C				
PT 1000 (-)	D				

Power free wire cable
with M23 90° connector



SKA DDR 090 - 148 - 245 SKA DDR 335 - 430

Lenght (mm)	Order code	Lenght (mm)	Order code
3000	003108020075	3000	003108005108
5000	003108020076	5000	003108020014
10000	003108020077	10000	003108005110

FLYING CONNECTORS M23

Straight power connector pin included BSTA108NN00580236000 + 4 PIN 60.003.11 FM/2mm CRIMP.0,35-2,5 SPRING + 4 PIN 60.001.11 FM/1mm CRIMP.0,14-1 SPRING	order code 007117000472	
Straight signal connector pin included ASTA014NN00410235000 17p/FM + 17 PIN 60.011.11 FM/1mm CRIMP.0,14-1	order code 007117000462	
90° power connector pin included BSDA108NN00420200000 + 4 PIN 60.003.11 FM/2mm CRIMP.0,35-2,5 SPRING + 4 PIN 60.001.11 FM/1mm CRIMP.0,14-1 SPRING	order code 007117002055	
90° signal connector pin included ASDA014NN00480150000 + 17 PIN 60.011.11 FM/1mm CRIMP.0,14-1	order code 007117002056	

FLEXI PRO

SERVO DRIVE

The FLEXI PRO series features a high-performance digital servo drive offering advanced functionality, high power density and seamless commissioning in a superior package. The innovative hardware design and software algorithms boast outstanding performance in one of the smallest footprints in the market.

FEATURES

- > MULTIFEEDBACK
- > DIGITAL I/O: 11 DIGITAL INPUT AND 6 OUTPUT CUSTOMIZABLE WITH SEVERAL BUILT-IN FUNCTIONS AND INTERNAL SCRIPT
- > CONTROL: HD ADVANCED CONTROL LOOP WITH ADAPTIVE GAINS
- > SERVO MODES: TORQUE, VELOCITY AND POSITION WITH S-CURVE PROFILE
- > STO SIL 2
- > INTEGRATED SUPPORT FOR EXTERNAL BRAKING RESISTOR
- > COMPLETE MOTOR DATABASE

BENEFITS

- > INTELLIGENT AUTO-TUNING - MINIMIZES POSITION ERROR AND SETTLING TIME TO ALMOST ZERO

Engineering experience and expertise has been implemented in a sophisticated Auto-Tuning function that performs optimal configurations for a difference-making performance

- > NEW CURRENT LOOP DESIGN - ACHIEVES AN INDUSTRY-LEADING FREQUENCY RESPONSE OF UP TO 3.0 KHZ

Rapid control loop sample rates and flexible filtering options provide a faster response, and ensure maximum machine accuracy and throughput

- > INNOVATIVE ANTI-VIBRATION ALGORITHM - ELIMINATES MECHANICAL RESONANCE

An active-non-linear algorithm eliminates vibration in highly flexible resonant systems. Commissioning is easy since only few gain parameters are required



INTERFACE

- > USB WITH DAISY CHAIN CAPABILITY
- > PULSE & DIRECTION
- > ANALOG VELOCITY AND TORQUE COMMAND $\pm 10V$

CANopen

EtherCAT®

PROFINET®
INDUSTRIAL ETHERNET

FLEXIBLE AND COMPREHENSIVE


PRODUCT DATA


FEATURE	UNITS	FPRO 1D5	FPRO 003	FPRO 4D5	FPRO 006	FPRO 008	FPRO 010	FPRO 013	FPRO 020	FPRO 024	FPRO 003	FPRO 006	FPRO 012	FPRO 024	FPRO 030
Input Voltage	VAC	120/240 VAC Single Phase		240 VAC Single or Three Phase				120/240 VAC Three Phase		400/480 VAC Three Phase					
Max Continuos power output	W	350	700	1000	1400	1800	2300	3000	4500	5500	1100	2200	4400	9000	11000
Efficiency at rated Power	%														
Auxiliary Supply Voltage		120 .. 240 Vac								24 Vdc					
Continuous current rms	A rms	1,5	3	4,5	6	8	10	13	20	24	3	6	12	24	30
Peak current	A rms	4,5	9	18	18	28	28	28	48	48	9	18	24	72	90
Ambient Operating Temperature	°C														
Maximum Humidity	%														
Vibration															
Shock															
Mounting Method															
Dimensions	WxDxH mm	43x144x150		55x167x150		62x182x170			117x194x234		110x193x163		FPRO 012 117x194x234 FPRO 024 - FPRO 030 147x209x353		
Weight	Kg	0,7	0,75	0,97	0,97	1,15	1,15	1,15	3,2	3,2	2,1	2,1	3,2	10,5	10,5

FLEXI PRO SUITE

> SIMPLIFIES SETUP, TESTING AND TUNING

User-friendly FLEXI SUITE software provides step-by-step guidance through the setup and tuning process. Setup and testing are intuitive thanks to auto-tuning functions and graphic representations of control loops

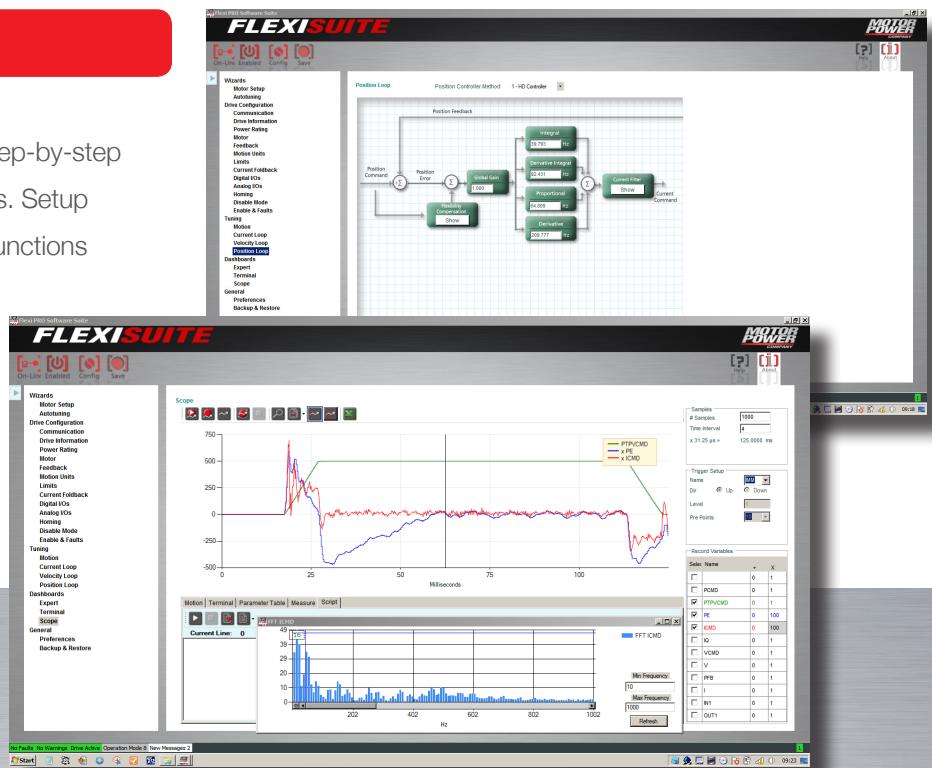

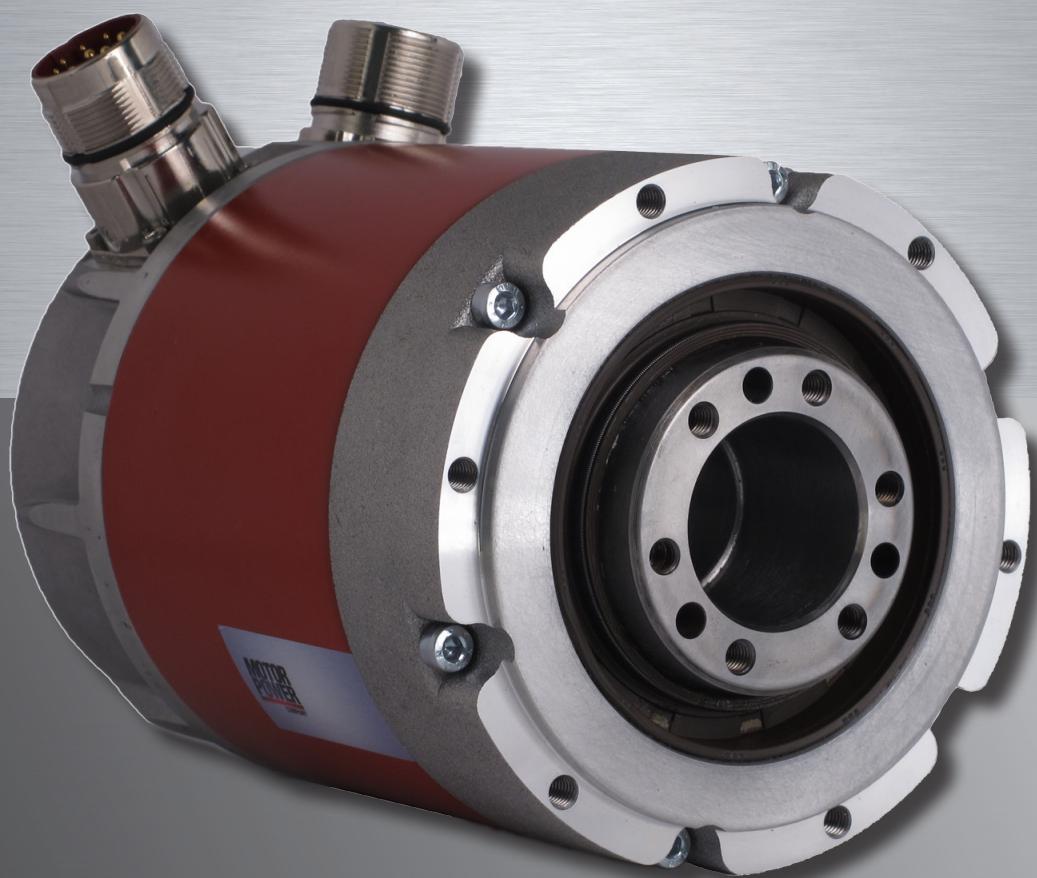

SEE IT BEFORE IT HAPPENS

**MOTOR
POWER**
COMPANY

Motor Power Company
www.motorpowerco.com
info@motorpowerco.it

All rights reserved.
Complete or partial reproduction
is not allowed without our permission.

All technical data in this catalog
may be changed without prior notice.

SEE IT BEFORE IT HAPPENS

MOTOR
POWER
COMPANY

MOTORS

MOTION CONTROL

MECHATRONICS

**MOTOR
POWER
COMPANY**

Motor Power Company s.r.l.

Via Leonardo Da Vinci, 4
42024 Castelnovo Sotto
Reggio Emilia - Italia
Tel. 0039 0522 682710
Fax 0039 0522 683552
info@motorpowerco.it

Motor Power Company GmbH

Dillberg, 11
97828 Marktheidenfeld
Germany
Tel 0049 9391 9198905
Fax 0049 9391 9198907
info@motorpowerco.de

Motor Power Company Asia Ltd.

Workshop 7, Shiny Science Park No.
111, Dong Ting North Rd.
215400 Taicang, Jiangsu Province
P.R.China
Tel 0086-512-33337978
Fax 0086-512-53207871
infoasia@motorpowerco.com